

# Lightology

lightology.com  
866-954-4489  
04-27-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **ELE449212**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Element 4IN RD Flanged Adj New Construction Non-IC Housing By Visual Comfort Architectural



### Description

The 4 Inch Round Flanged Adjustable Non-IC Airtight Housing is constructed of heavy gauge cold rolled steel with a durable Matte Black powder coat finish. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. Features a high-low lamp positioning feature which allows the LED to be positioned closer to the aperture for maximum light output and efficiency or higher to minimize glare and flash on the trim. Adjustability allows for tool-free hot aiming and locking including 0 to 40 degree tilt and 361 degree rotation. This specification grade housing includes a low output 17 watt, high output 29 watt, or max output 35 watt LED module in 2700K, 3000K, 3500K or Warm Dim (3000K-1800K) color temperature. Available with 10 degree (17 watt only), 18 degree, 25 degree, 40 degree or 60 degree beam angle option. Includes integral junction box approved for branch circuit through wiring. Constant current driver. 4.5 inch ceiling opening. Dimmable down to 5 percent with an electronic low voltage dimmer or 1 percent with a 0-10V dimmer, sold separately. A complete fixture includes a housing and trim, sold separately. Note: 10 degree beam angle available in low output (17 watt) 2700K, 3000K and 3500K color temperature options only. Warm Dim not available in 35 watt option.

### Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Matte Black
WATTAGE	29W
DIMMER	Low Voltage Electronic
DIMENSIONS	14.5"L x 11.5"W x 5.3"H
INTEGRATED LED MODULE	1 x LED/29W/120V LED

### Technical Information

APERTURE SHAPE	Round
HOUSING HEIGHT	5"
HOUSING TYPE	New construction NON IC Airtight
CEILING TYPE	Drywall with Trim
BEAM ANGLE	18°
COLOR RENDERING	90 CRI
LAMP COLOR	2700K
LUMENS/WATT	71.03
LUMINOUS FLUX	2060 lumens



Shown in matte black

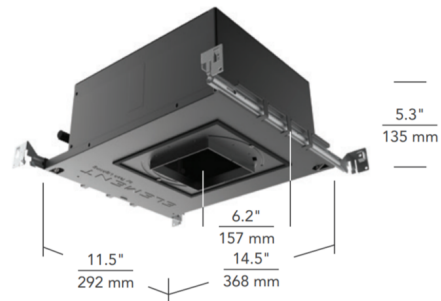

CLICK TO VIEW PRODUCT

Notes: