



BRAND

Visual Comfort Architectural

DESCRIPTION

The 4 Inch Round Flanged Fixed Downlight Non-IC Airtight Housing is constructed of heavy gauge cold rolled steel with a durable Matte Black powder coat finish. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. This specification grade housing includes a low output 17 watt, high output 29 watt, or max output 35 watt, or Warm Dim (3000K-1800K) LED module available with 10 degree (17 watt only), 18 degree, 25 degree, 40 degree or 60 degree beam angle option. Includes integral junction box approved for branch circuit through wiring. Constant current driver. 4.5 inch ceiling opening, offset. Dimmable down to 5 percent with an electronic low voltage dimmer or 1 percent with a 0-10V dimmer, sold separately. A complete fixture requires a housing and trim, sold separately. Note: 10 degree beam angle available in low output (17 watt) 2700K, 3000K and 3500K color temperature options only. Warm Dim not available in 35 watt option.




Shown in: Matte Black

| | |
|-----------------------|-------------------------|
| TRIM COLOR | N/A |
| BODY FINISH | Matte Black |
| WATTAGE | 29W |
| DIMMER | Low Voltage Electronic |
| DIMENSIONS | 14.5"L x 11.5"W x 5.3"H |
| INTEGRATED LED MODULE | |
| LAMP | 1 x LED/29W/120V LED |

Technical Information

| | |
|-----------------|----------------------------------|
| LUMINOUS FLUX | 2060 lumens |
| LUMENS/WATT | 71.03 |
| LAMP COLOR | 2700K |
| COLOR RENDERING | 90 CRI |
| BEAM ANGLE | 25° |
| FUNCTION | Downlight |
| CEILING TYPE | Drywall with Trim |
| HOUSING TYPE | New construction NON IC Airtight |
| HOUSING HEIGHT | 5" |
| SPEC # | ELE449218 |

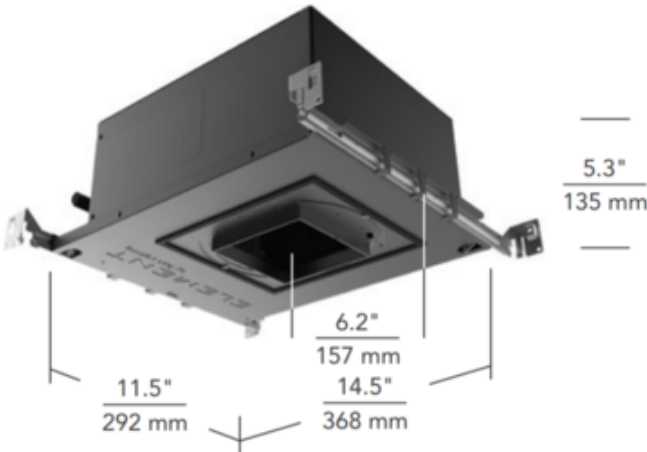

| | | | | |
|---------|---------|--------------|-------------|------|
| COMPANY | PROJECT | FIXTURE TYPE | APPROVED BY | DATE |
| | | | | |