



## BRAND

Visual Comfort Architectural

## DESCRIPTION

The 4 Inch Round Flangeless Adjustable IC Airtight Housing is constructed of heavy gauge cold rolled steel with a durable Matte Black powder coat finish. IC designation allows for insulation to be in direct contact with housing. This specification grade housing includes a low output 17 watt or high output 31 watt LED module available with choice of 2700K, 3000K or 3500K color temperature, or Warm Dim 3000K-1800K. Available in an 18 degree, 25 degree, 40 degree, or 60 degree beam angle option. Features high-low lamp positioning. Adjustability allows for tool-free hot aiming and locking including 0 to 40 degree tilt and 361 degree rotation. 4.5 inch ceiling opening. ETL listed. Suitable for damp locations. Title 24 compliant. 5 year warranty. Dimmable down to 5 percent with an electronic low voltage (ELV) or 1 percent with a 0-10V dimmer, sold separately. A complete fixture includes a housing and trim, sold separately. NOTE: 10 DEGREE BEAM ANGLE AVAILABLE ON LOW OUTPUT (17 WATT) 2700K, 3000K and 3500K COLOR TEMPERATURE OPTIONS ONLY.




Shown in: Matte Black

TRIM COLOR	N/A
BODY FINISH	Matte Black
WATTAGE	31W
DIMMER	Low Voltage Electronic
DIMENSIONS	14.5"L x 11.5"W x 5.3"H
INTEGRATED LED MODULE	
LAMP	1 x LED/120V LED

### Technical Information

LUMINOUS FLUX	2060 lumens
LUMENS/WATT	66.45
LAMP COLOR	2700K
COLOR RENDERING	90 CRI
BEAM ANGLE	18°
CEILING TYPE	Drywall Trimless/Flush
HOUSING TYPE	New construction IC Airtight
HOUSING HEIGHT	7"
APERTURE SHAPE	Round
SPEC #	ELE449247

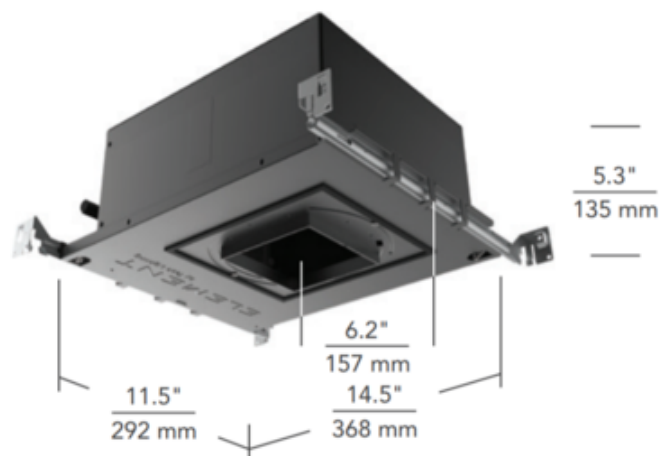

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE