



BRAND

Visual Comfort Architectural

DESCRIPTION

The 4 Inch Round Flangeless Fixed Downlight Non-IC Airtight New Construction Housing is constructed of heavy gauge cold rolled steel with a durable Black powder coat finish. Non-IC designation requires housing to have a 3 inch minimum clearance away from insulation. This specification grade housing features an integral low output 17 watt, high output 29 watt, or max output 35 watt LED module available with choice of 2700K, 3000K or 3500K color temperature, or Warm Dim 3000K-1800K. Available in a 10 degree (17 watt only), 18 degree, 25 degree, 40 degree, or 60 degree beam angle option. High-low positioning, 45 degree collar rotation. 4.50 inch ceiling cutout. ETL listed. Suitable for damp locations. Title 24 compliant. 5 year warranty. Dimmable down to 5 percent with an electronic low voltage (ELV) or 1 percent with a 0-10V dimmer, sold separately. A complete fixture includes a housing and trim, sold separately. NOTE: 10 DEGREE BEAM ANGLE AVAILABLE ON LOW OUTPUT (17 WATT) 2700K, 3000K AND 3500K COLOR TEMPERATURE OPTIONS ONLY.




Shown in: Matte Black

TRIM COLOR	N/A
BODY FINISH	Matte Black
WATTAGE	31W
DIMMER	Low Voltage Electronic
DIMENSIONS	14.5"L x 11.5"W x 5.3"H
INTEGRATED LED MODULE	
LAMP	1 x LED/31W/120V LED

Technical Information

LUMINOUS FLUX	2060 lumens
LUMENS/WATT	66.45
LAMP COLOR	2700K
COLOR RENDERING	90 CRI
BEAM ANGLE	18°
FUNCTION	Downlight
CEILING TYPE	Drywall Trimless/Flush
HOUSING TYPE	New construction NON IC Airtight
HOUSING HEIGHT	5"

SPEC #	ELE449250
--------	-----------

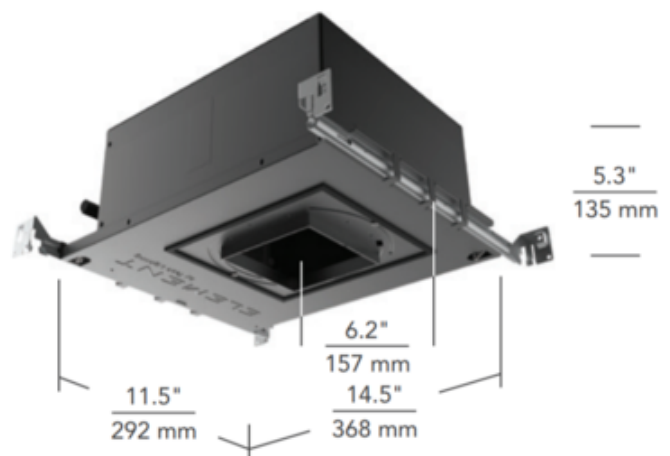

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE