

Lightology

lightology.com
866-954-4489
07-04-25

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **ELE449284**
Approved On: _____ Approved By: _____

Element 4IN SQ Flanged Adjustable New Construction Housing

By Visual Comfort Architectural



Description

The 4 Inch Square Flanged Adjustable Non-IC Airtight or IC Airtight New Construction Housing is constructed of heavy gauge cold rolled steel with a durable Black powder coat finish. This specification grade housing features an integral 17 watt (1450-1800 lumen output), 29 watt (2465-2900 lumen output), or 35 watt (3400-4000 lumen output) LED module available with choice of 2700K, 3000K or 3500K color temperature. Available in a 10 degree (17 watt only), 18 degree, 25 degree, 40 degree, or 60 degree beam angle option. Lockable hot-aiming 0-40 degree tilt, 361 degree rotation, high-low positioning, 45 degree collar rotation. 4.5 inch ceiling cutout, suitable for ceilings up to 2.5 inch thick. ETL listed. Suitable for damp locations. Title 24 compliant. 5 year warranty. Note: A complete fixture requires a housing and trim, sold separately. Note: 10 degree beam angle available in 17 watt option only.

Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Black
WATTAGE	29W
DIMMER	Low Voltage Electronic
DIMENSIONS	14.5"L x 11.5"W x 5.3"H
INTEGRATED LED MODULE	1 x LED/29W/120V LED

Technical Information

APERTURE SIZE	4.000"
APERTURE SHAPE	Square
HOUSING HEIGHT	6"
HOUSING TYPE	New construction NON IC Airtight
CEILING TYPE	Drywall with Trim
FUNCTION	Adjustable Accent
BEAM ANGLE	18°
COLOR RENDERING	90 CRI
LAMP COLOR	2700K
LUMENS/WATT	71.03
LUMINOUS FLUX	2060 lumens



Shown in black

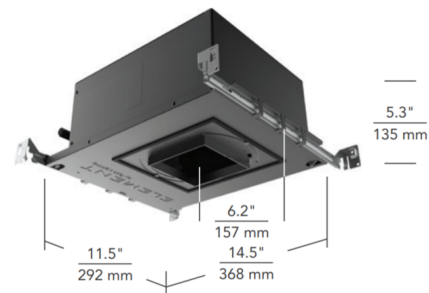

CLICK TO VIEW PRODUCT

Notes: