



BRAND

Visual Comfort Architectural

DESCRIPTION

The 4 Inch Square Flanged Adjustable Non-IC Airtight or IC Airtight New Construction Housing is constructed of heavy gauge cold rolled steel with a durable Black powder coat finish. This specification grade housing features an integral 17 watt (1450-1800 lumen output), 29 watt (2465-2900 lumen output), or 35 watt (3400-4000 lumen output) LED module available with choice of 2700K, 3000K or 3500K color temperature. Available in a 10 degree (17 watt only), 18 degree, 25 degree, 40 degree, or 60 degree beam angle option. Lockable hot-aiming 0-40 degree tilt, 361 degree rotation, high-low positioning, 45 degree collar rotation. 4.5 inch ceiling cutout, suitable for ceilings up to 2.5 inch thick. ETL listed. Suitable for damp locations. Title 24 compliant. 5 year warranty. Note: A complete fixture requires a housing and trim, sold separately. Note: 10 degree beam angle available in 17 watt option only.




Shown in: Black

TRIM COLOR	N/A
BODY FINISH	Black
WATTAGE	29W
DIMMER	Low Voltage Electronic
DIMENSIONS	14.5"L x 11.5"W x 5.3"H
INTEGRATED LED MODULE	
LAMP	1 x LED/29W/120V LED

Technical Information

LUMINOUS FLUX	2060 lumens
LUMENS/WATT	71.03
LAMP COLOR	2700K
COLOR RENDERING	90 CRI
BEAM ANGLE	25°
FUNCTION	Adjustable Accent
CEILING TYPE	Drywall with Trim
HOUSING TYPE	New construction IC Airtight
HOUSING HEIGHT	6"

SPEC #	ELE449285
--------	-----------

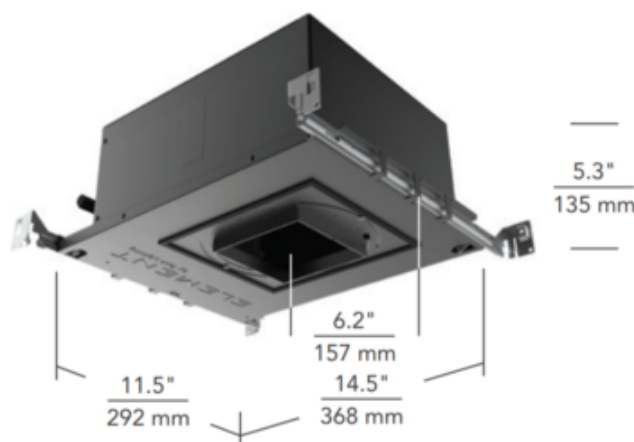

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE