

Lightology

lightology.com
866-954-4489
04-25-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **ELE449302**
 Approved On: _____ Approved By: _____

Element 4IN SQ Flangeless Adj New Construction Housing By Visual Comfort Architectural



Description

The 4 Inch Square Flangeless Adjustable Non-IC Airtight or Airtight New Construction Housing is a specification grade housing featuring an integral low output 17 watt, high output 31 watt, or max output 35 watt LED module in three color temperature options with 18, 25, 40 or 60 degree beam angle, or Warm Dim (3000K to 1800K). Lockable hot-aiming 0-40 degree tilt, 361 degree rotation, high-low positioning, and 45 degree collar rotation. 4.5 inch ceiling cutout. Not all options are available. Note: A complete fixture requires a housing and trim, sold separately. Note: Warm Dim not available in max output 35 watt options.

Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Black
WATTAGE	31W
DIMMER	Low Voltage Electronic
DIMENSIONS	14.5"L x 11.5"W x 5.3"H
INTEGRATED LED MODULE	1 x LED/31W/120V LED

Technical Information

APERTURE SIZE	4.000"
APERTURE SHAPE	Square
HOUSING HEIGHT	6"
HOUSING TYPE	New construction NON IC Airtight
CEILING TYPE	Drywall Trimless/Flush
FUNCTION	Adjustable Accent
BEAM ANGLE	18°
COLOR RENDERING	90 CRI
LAMP COLOR	2700K
LUMENS/WATT	66.45
LUMINOUS FLUX	2060 lumens



Shown in black

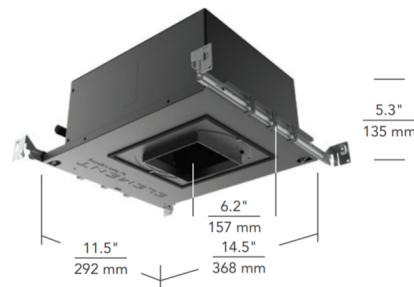

CLICK TO VIEW PRODUCT

Notes: