



BRAND

Visual Comfort Architectural

DESCRIPTION

1X4 Flanged Trimmed Adjustable 4-Light Non-IC Airtight Housing is constructed of heavy gauge cold rolled steel with durable Black or White powder coat finish. Flanged housings include a color matched cold rolled steel ceiling flange. Low profile design for use in standard 2X6 construction. Accommodates up to 2 inch ceiling thickness. Includes integrated junction box approved for branch circuit through wiring. Includes four 18 watt LED modules with choice of Very Warm White 2700K, Warm White 3000K or Neutral White 3500K color temperature, 90CRI, 1370 lumens per module. Available in a 20 degree, 30 degree and 40 degree beam angle option. 35 degree tilt and 360 degree rotation with tool-free locking. 5 inch x 5 inch ceiling cut out opening per module. Housing includes individual driver for each module. Holds up to two optional lenses, sold separately. ETL listed. Suitable for damp locations. 5 year warranty. Housing: 24.9 inch length x 8.7 width x 5.8 inch height. May be dimmed using a TRIAC, electronic low voltage or 0-10V (down to 5 percent) dimmer, sold separately. See attached manufacturer dimmer chart for dimmer compatibility. Includes housing and LED modules. Trim (square on square or round on square), sold separately.




Shown in: Black

TRIM COLOR	N/A
BODY FINISH	Black
WATTAGE	72W
DIMMER	Low Voltage Electronic
DIMENSIONS	24.9"L x 8.7"W x 5.8"H
INTEGRATED LED MODULE	
LAMP	4 x LED/18W/120V LED


Technical Information

LUMINOUS FLUX	5480 lumens
LUMENS/WATT	304.44
LAMP COLOR	3500K
COLOR RENDERING	90 CRI
BEAM ANGLE	20°
LAMP LIFE	50000 hours
FUNCTION	Adjustable Accent
CEILING TYPE	Drywall with Trim
HOUSING TYPE	New construction NON IC Airtight

SPEC #	ELE449697
--------	-----------

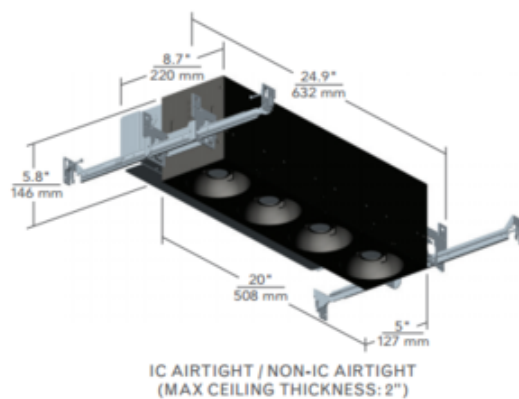

IC AIRTIGHT / NON-IC AIRTIGHT
(MAX CEILING THICKNESS: 2")



COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE