



DESIGNER

Gregory Kay

BRAND

PureEdge Lighting

DESCRIPTION

The Stratus Linear Indoor Wall Grazer is a Non-IC rated fixture designed for use in recessed cove or surface mount applications for new residential, new commercial, and remodel. Lights textured walls up to 30 feet high. Mounts flush to ceilings or recessed within a pocket cove for the most dramatic effect. Available in 1 foot and 4 foot lengths in 3000K or 4200K color temperature. Link multiple Stratus fixtures to create long runs. Included components: Wall mounting bracket, housing, joiner bracket, reflector, LED panel, one internal 0-10V power supply, and louver. Note: End caps sold separately. Feed fixture with 120-277VAC. Dimmable with a 0-10V dimmer, sold separately. For indoor dry locations. Product is built to order.



Shown in: Aluminum

SHADE COLOR	N/A
BODY FINISH	Aluminum
WATTAGE	15W
DIMMER	0-10V
DIMENSIONS	12"L x 5.64"H x 5.5"D
INTEGRATED LED MODULE	
LAMP	1 x LED/120-277V LED

Technical Information

LUMINOUS FLUX	1005 lumens
LUMENS/WATT	67.00
LAMP COLOR	4200K
COLOR RENDERING	90 CRI


SPEC #	EDG50985
--------	----------



INCLUDED COMPONENTS
Wall Mounting Bracket, Housing, Joiner Bracket, Reflector,
LED Panel, Power Supply and Louver

ACCESSORIES
End Caps

INCLUDED COMPONENTS

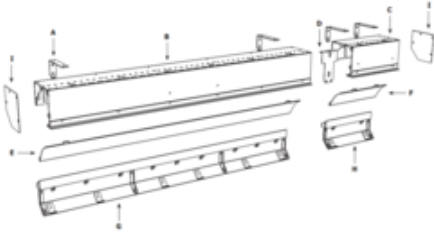

A. WALL MOUNTING BRACKET
For all three types of installation conditions: new residential, new commercial, and remodel.
B. 4" HOUSING
Non-IC, 0.50" thick die formed aluminum.
C. 1" HOUSING
Non-IC, 0.50" thick die formed aluminum.
D. JOINER BRACKET
Joins multiple lengths of Stratus fixtures.
E. 4" REFLECTOR
Precision cut aluminum.

F. 1" REFLECTOR
Precision cut aluminum.
G. 4" LED PANEL
Integrated 3000K, 4200K, or 5000K LEDs.
H. 1" LED PANEL
Integrated 3000K, 4200K, or 5000K LEDs.
I. END CAP
Sold in pairs. Required at end of run.

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE