

# Lightology

lightology.com  
866-954-4489  
05-25-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **EDG513089**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Tie Stix Metal Fixed Warm Dim Wall Light By PureEdge Lighting



### Description

Tie Stix Metal Fixed Position Warm Dim Wall Light with 2 Inch Rectangle, 4 Inch Rectangle or 4 Inch Square Canopy features a direct flat, milky white lens with 100 degree beam spread. Metal finish options include include Satin Nickel, Chrome, Antique Bronze, Satin Black and White. Canopy and hardware are offered in Satin Nickel, Chrome, Antique Bronze, Satin Black or White finish. Available in nominal widths from 15 to 69 inches (Note: see line drawing for exact lengths). 2RE canopy mounts to standard 4 inch electrical box with single gang plaster ring or single gang electrical box. Power supply fits inside electrical box. Includes 5 watts LED per foot available with Warm Dim 2700K (27D) or 3000K (30D) color temperature at 100 percent and dims to 2200K. Includes a 120V input, 24VDC Class 2 output, electronic low voltage LED power supply, dimmable with an electronic low voltage dimmer, sold separately. Product is built to order. Can be mounted in a horizontal or vertical position.

### Specifications


COLOR . . . . . White  
 BODY FINISH . . . . . Satin Nickel  
 WATTAGE . . . . . 6.3W  
 DIMMER . . . . . Low Voltage Electronic  
 DIMENSIONS . . . . . 15"W x 0.9"H x 0.9"D  
 INTEGRATED LED MODULE . . . . . 1x LED/6.25W/24V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
 COLOR RENDERING . . . . . 92 CRI  
 LAMP COLOR . . . . . 2700K Warm Dim  
 LUMENS/WATT . . . . . 57.92  
 LUMINOUS FLUX . . . . . 362 lumens



Shown in satin nickel / white

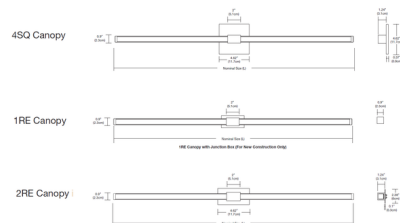

Nominal Light Length (Inches)	Exact Length (Nominal Length + 0.125)	Exact Length (Metal Finish Included)
12	12.125	12.125
15	15.125	15.125
18	18.125	18.125
21	21.125	21.125
24	24.125	24.125
27	27.125	27.125
30	30.125	30.125
33	33.125	33.125
36	36.125	36.125
39	39.125	39.125
42	42.125	42.125
45	45.125	45.125
48	48.125	48.125
51	51.125	51.125
54	54.125	54.125
57	57.125	57.125
60	60.125	60.125
63	63.125	63.125
66	66.125	66.125
69	69.125	69.125



CLICK TO VIEW PRODUCT

Notes: \_\_\_\_\_