

Lightology

lightology.com
866-954-4489
12-28-25

Project: _____

Company: _____

Location: _____ Fixture Type: _____

SPEC #: **EDG515888**

Approved On: _____ Approved By: _____

Tie Stix Metal Fixed Warm Dim Wall Light

By PureEdge Lighting



Description

Tie Stix Metal Fixed Position Warm Dim Wall Light with 2 Inch Rectangle, 4 Inch Rectangle or 4 Inch Square Canopy features a direct flat, milky white lens with 100 degree beam spread. Metal finish options include Satin Nickel, Chrome, Antique Bronze, Satin Black and White. Canopy and hardware are offered in Satin Nickel, Chrome, Antique Bronze, Satin Black or White finish. Available in nominal widths from 15 to 69 inches (Note: see line drawing for exact lengths). 2RE canopy mounts to standard 4 inch electrical box with single gang plaster ring or single gang electrical box. Power supply fits inside electrical box. Includes 5 watts LED per foot available with Warm Dim 2700K (27D) or 3000K (30D) color temperature at 100 percent and dims to 2200K. Includes a 120V input, 24VDC Class 2 output, electronic low voltage LED power supply, dimmable with an electronic low voltage dimmer, sold separately. Product is built to order. Can be mounted in a horizontal or vertical position.

Specifications

COLOR White

BODY FINISH Satin Nickel

WATTAGE 6.3W

DIMMER Low Voltage Electronic

DIMENSIONS 15"W x 2.38"H x 1.34"D

INTEGRATED LED MODULE 1 x LED/6.25W/24V LED

Technical Information

LAMP LIFE 50000 hours

COLOR RENDERING 92 CRI


LAMP COLOR 2700K Warm Dim

LUMENS/WATT 57.92

LUMINOUS FLUX 362 lumens



Shown in satin nickel / white

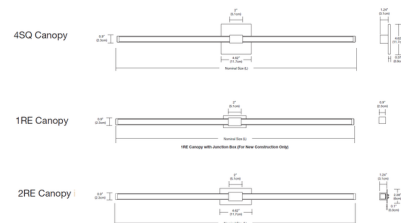

Nominal Light Length (Inches)	Exact Length Metal Finish (Inches)	Exact Length Metal Finish (Inches)
12	12.125"	12.125"
15	15.125"	15.125"
18	18.125"	18.125"
21	21.125"	21.125"
24	24.125"	24.125"
27	27.125"	27.125"
30	30.125"	30.125"
33	33.125"	33.125"
36	36.125"	36.125"
39	39.125"	39.125"
42	42.125"	42.125"
45	45.125"	45.125"
48	48.125"	48.125"
51	51.125"	51.125"
54	54.125"	54.125"
57	57.125"	57.125"
60	60.125"	60.125"
63	63.125"	63.125"
66	66.125"	66.125"
69	69.125"	69.125"



CLICK TO VIEW PRODUCT

Notes: