

# Lightology

lightology.com  
866-954-4489  
06-04-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **EDG515888**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Tie Stix Metal Fixed Warm Dim Wall Light By PureEdge Lighting



### Description

Tie Stix Metal Fixed Position Warm Dim Wall Light with 2 Inch Rectangle, 4 Inch Rectangle or 4 Inch Square Canopy features a direct flat, milky white lens with 100 degree beam spread. Metal finish options include include Satin Nickel, Chrome, Antique Bronze, Satin Black and White. Canopy and hardware are offered in Satin Nickel, Chrome, Antique Bronze, Satin Black or White finish. Available in nominal widths from 15 to 69 inches (Note: see line drawing for exact lengths). 2RE canopy mounts to standard 4 inch electrical box with single gang plaster ring or single gang electrical box. Power supply fits inside electrical box. Includes 5 watts LED per foot available with Warm Dim 2700K (27D) or 3000K (30D) color temperature at 100 percent and dims to 2200K. Includes a 120V input, 24VDC Class 2 output, electronic low voltage LED power supply, dimmable with an electronic low voltage dimmer, sold separately. Product is built to order. Can be mounted in a horizontal or vertical position.

### Specifications


COLOR . . . . . White  
 BODY FINISH . . . . . Satin Nickel  
 WATTAGE . . . . . 6.3W  
 DIMMER . . . . . Low Voltage Electronic  
 DIMENSIONS . . . . . 15"W x 2.38"H x 1.34"D  
 INTEGRATED LED MODULE . . . . . 1x LED/6.25W/24V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
 COLOR RENDERING . . . . . 92 CRI  
 LAMP COLOR . . . . . 2700K Warm Dim  
 LUMENS/WATT . . . . . 57.92  
 LUMINOUS FLUX . . . . . 362 lumens



Shown in satin nickel / white

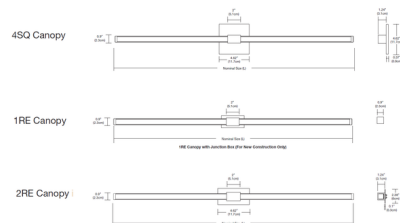

Nominal Light Length (Inches)	Exact Length (Nominal Length - 0.375)	Exact Length (Metal Finish Position)
12	11.625	11.1"
15	14.625	14.1"
18	17.625	17.1"
21	20.625	20.1"
24	23.625	23.1"
27	26.625	26.1"
30	29.625	29.1"
33	32.625	32.1"
36	35.625	35.1"
39	38.625	38.1"
42	41.625	41.1"
45	44.625	44.1"
48	47.625	47.1"
51	50.625	50.1"
54	53.625	53.1"
57	56.625	56.1"
60	59.625	59.1"
63	62.625	62.1"
66	65.625	65.1"



CLICK TO VIEW PRODUCT

Notes: \_\_\_\_\_