

# Lightology

lightology.com  
866-954-4489  
05-24-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **EDG521674**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Tie Stix Metal Linear Adjustable Wall Light By PureEdge Lighting



### Description

The Tie Stix Metal Linear 2-Light Adjustable Wall Light with a 4 Inch Square, 1 Inch Rectangle, or 2 Inch Rectangle Canopy features a direct flat, milky white lens with 100 degree beam spread and an integral swivel for adjustability. Metal channel finish options include Satin Nickel, Chrome, Antique Bronze, Satin Black or White. Canopy and hardware are offered in Satin Nickel, Chrome, Antique Bronze, Satin Black or White finish. Includes 5 watts LED per foot in a spectrum of color temperature options, including Warm Dim, and lengths from 15 to 70 inches. 4SQ canopy mounts to standard 4 inch square electrical box with round plaster ring. 2RE mounts to standard 4 inch electrical box with single gang plaster ring or single gang electrical box. 1RE mounts to Slim Profile Junction Box (included) in new construction applications. Tie Stix may be mounted horizontally or vertically. Includes a 120V input, 24VDC Class 2 output, electronic low voltage LED power supply, dimmable with an ELV dimmer, sold separately. Product is built to order.

### Specifications


COLOR . . . . . White  
 BODY FINISH . . . . . Chrome  
 WATTAGE . . . . . 6.5W  
 DIMMER . . . . . Low Voltage Electronic  
 DIMENSIONS . . . . . 15"W x 0.9"H x 2.12"D  
 INTEGRATED LED MODULE . . . . . 1 x LED/6.5W/24V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
 COLOR RENDERING . . . . . 85 CRI  
 LAMP COLOR . . . . . 3500K  
 LUMENS/WATT . . . . . 54.00  
 LUMINOUS FLUX . . . . . 351 lumens



Shown in satin black / white

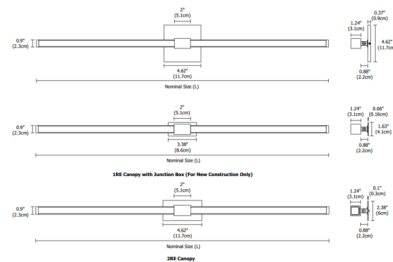

22K, 27K, 30K, 35K, 40K and 57K

| ORDERING CODE (NOMINAL SIZE) | WOOD CHANNEL OVERALL LENGTH (INCHES) | METAL CHANNEL OVERALL LENGTH (INCHES) |
|------------------------------|--------------------------------------|---------------------------------------|
| 15                           | 15.9                                 | 15.5                                  |
| 17                           | 18.3                                 | 17.9                                  |
| 22                           | 23.1                                 | 22.7                                  |
| 29                           | 30.3                                 | 29.9                                  |
| 34                           | 35.1                                 | 34.7                                  |
| 46                           | 47.1                                 | 46.7                                  |
| 58                           | 59.1                                 | 58.7                                  |
| 70                           | 71.1                                 | 70.7                                  |



CLICK TO VIEW PRODUCT

Notes: