

# Lightology

lightology.com  
866-954-4489  
06-18-25

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **EDG531279**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Tie Stix Wood Indirect Adjustable Wall Light

By PureEdge Lighting



### Description

Tie Stix Vertical Indirect Adjustable Wall Light with 4 Inch Square, 1 Inch Rectangle or 2 Inch Rectangle Canopy features a direct flat, milky white lens and provides an indirect glow. Features integral hinge for vertical angle adjustment. Wood finish options include Cherry, Walnut, White Oak, Espresso and Maple. Canopy and hardware are offered in Satin Nickel, Chrome or Antique Bronze finish. Available in 12-46 inch height options. 4SQ canopy mounts to standard 4 inch square electrical box with round plaster ring. 2RE mounts to standard 4 inch electrical box with single gang plaster ring or single gang electrical box. 1RE mounts to Slim Profile Junction Box (included) in new construction applications. Includes 5 watts LED per foot available in a spectrum of color temperature options. Includes a 120V input, 24VDC Class 2 output, electronic low voltage LED power supply, dimmable with an ELV dimmer: Lutron Diva DVELV-300P, Lutron Skylark SELV-300P, Lutron Maestro MAELV-600, Lutron Radio Ra 2, or Legrand Adorne ADTP703TU. ETL listed. ADA compliant. Suitable for damp locations. Fixture includes a 5 year warranty. Product is built to order.

### Specifications


COLOR . . . . . Wood Cherry  
BODY FINISH . . . . . Satin Nickel  
WATTAGE . . . . . 5.5W  
DIMMER . . . . . Low Voltage Electronic  
DIMENSIONS . . . . . 4.62"W x 13.2"H x 2.49"D  
INTEGRATED LED MODULE . . . . . 1 x LED/5.54W/24V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
COLOR RENDERING . . . . . 92 CRI  
LAMP COLOR . . . . . 2700K  
LUMENS/WATT . . . . . 53.97  
LUMINOUS FLUX . . . . . 299 lumens



Shown in satin nickel / wood cherry

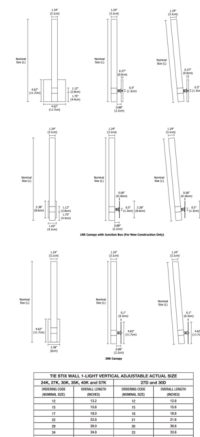

CLICK TO VIEW PRODUCT

Notes: