



BRAND

Juno Lighting

DESCRIPTION

The Aculux IC420 3.25 Inch 2000 Lumen IC New Construction Luminaire with 50 degree beam angle has 45 degree visual cutoff and features precision Acu-Aim geared hot-aiming. Compatible with downlight, adjustable and wall wash trims. IC housings are rated for direct contact with insulation Available in 2700K, 3000K, 3500K or 4000K color temperatures, 80CRI, with modular field interchangeable optics of 12 degree Spot, 24 degree Narrow Flood, 35 degree Flood, and 50 degree Wide Flood, 120 volt. LED driver field replaceable from above or below the ceiling. 50,000 hour lamp life rated at 70 percent lumen maintenance. Optional optical accessories sold separately. Trim styles include: Trim Ring, Self-Flanged and Flush Mount reflectors, sold separately. For flush mount installations in drywall ceiling, use the FMA4 flush mount adapter, sold separately. Accommodates up to three additional beam control lenses or filters, sold separately. UL and cUL listed for through branch wiring and damp locations. Wet location listed with certain trims. Energy Star qualified with select trims. 5 year warranty. 19.63 inch width x 13.75 inch depth x 8.94 inch height. See attached manufacturer dimmer compatibility reference for compatible dimmers with a 120 volt LED driver. A complete fixture includes a housing and trim, sold separately.




Shown in: Black

TRIM COLOR	N/A
BODY FINISH	Black
WATTAGE	27W
DIMMER	Dimmable
DIMENSIONS	19.63"W x 8.94"H x 13.75"D
INTEGRATED LED MODULE	
LAMP	1 x LED/27W/120V LED

Technical Information

LUMINOUS FLUX	2000 lumens
LUMENS/WATT	74.07
LAMP COLOR	2700K
COLOR RENDERING	80 CRI
BEAM ANGLE	50°
LAMP LIFE	50000 hours
FUNCTION	Adjustable Accent
CEILING TYPE	Drywall Trimless/Flush
HOUSING TYPE	New construction IC
HOUSING HEIGHT	9"
SPEC #	JUN538359

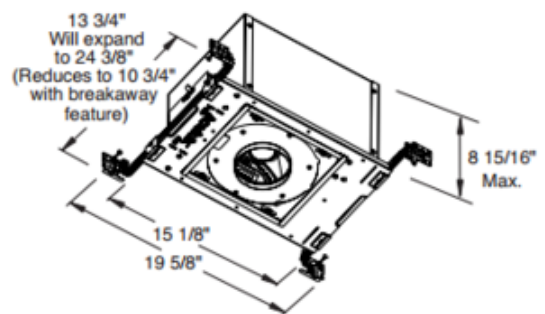

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE
