



## BRAND

Eurofase

## DESCRIPTION

The Amigo 28716 3 Inch Round Aperture Non-IC Remodel Housing with Gimbal Trimless is constructed of 18 gauge powder coated steel. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. Includes steel mesh plate with perforated perimeter to allow mud to bond to mounting surface leaving a seamless finish in the ceiling. Includes 15 watt, 120 volt LED module with 40 degree beam angle in 3000K or 3500K color temperature, 80+CRI, 1290 lumens. 30 degree tilt. 50,000 hour average lamp life. Class 2 dimmable constant current driver included. Driver box mates to fixture by 12 inch flexible BX cable. Thermally protected. Input voltage: 120 volt. Dimmable with a TRIAC dimmer, sold separately. Cutout: 3 inch round. Can be converted to a Non-IC new construction housing using the 30537-019 mounting plate.




Shown in: White

TRIM COLOR	N/A
BODY FINISH	White
WATTAGE	15W
DIMMER	Standard 120V
DIMENSIONS	2.75"W x 5.75"H
INTEGRATED LED MODULE	
LAMP	1 x LED/15W/120V LED

### Technical Information

LUMINOUS FLUX	1290 lumens
LUMENS/WATT	86.00
LAMP COLOR	3000K
COLOR RENDERING	80 CRI
BEAM ANGLE	40°
LAMP LIFE	50000 hours
FUNCTION	Adjustable Accent
CEILING TYPE	Drywall Trimless/Flush
HOUSING TYPE	Remodel NON IC
HOUSING HEIGHT	6"
SPEC #	EUF543222

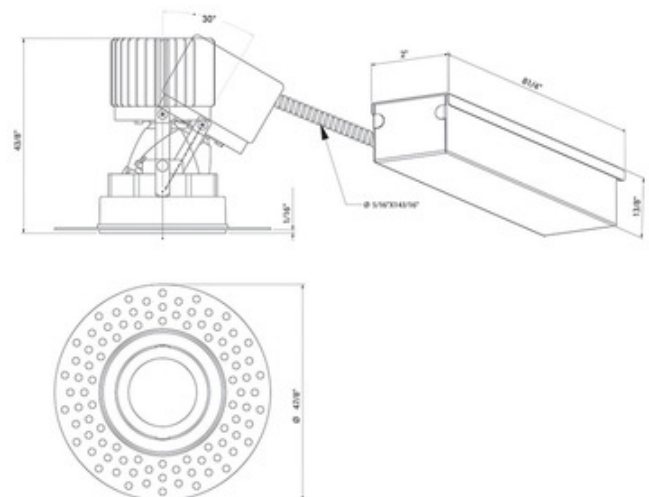

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE