




**BRAND**

Eurofase

**DESCRIPTION**

The 28721 3 Inch Square Aperture Non-IC Remodel Housing with Downlight Trim is constructed of 18 gauge powder coated steel. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. Includes 15 watt, 120 volt LED module with 40 degree beam angle in 3000K or 3500K color temperature, 80+CRI, 1290 lumens. 50,000 hour average lamp life. Class 2 dimmable constant current driver included. Driver box mates to fixture by 12 inch flexible BX cable. Thermally protected. Input voltage: 120 volt. Dimmable with a TRIAC dimmer, sold separately. Cutout: 3.25 inch square. Can be converted to a Non-IC new construction housing using the 30535-15 mounting plate.


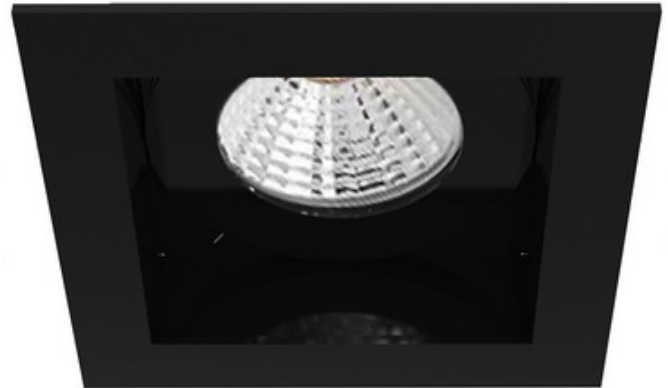


Shown in: Black

<b>TRIM COLOR</b>	N/A
<b>BODY FINISH</b>	Black
<b>WATTAGE</b>	15W
<b>DIMMER</b>	Standard 120V
<b>DIMENSIONS</b>	3.88"W x 5.75"H x 3.88"D
<b>INTEGRATED LED MODULE</b>	
<b>LAMP</b>	1 x LED/15W/120V LED

*Technical Information*

<b>LUMINOUS FLUX</b>	1290 lumens
<b>LUMENS/WATT</b>	86.00
<b>LAMP COLOR</b>	3000K
<b>COLOR RENDERING</b>	80 CRI
<b>BEAM ANGLE</b>	40°
<b>LAMP LIFE</b>	50000 hours
<b>FUNCTION</b>	Downlight
<b>CEILING TYPE</b>	Drywall with Trim
<b>HOUSING TYPE</b>	Remodel NON IC
<b>HOUSING HEIGHT</b>	6"
<b>SPEC #</b>	EUF543243

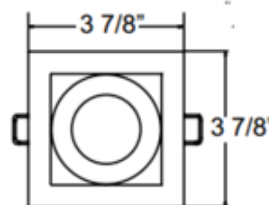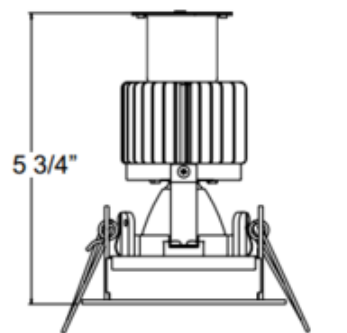

3 1/4"L X 3 1/4"W

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE

---