

Lightology

lightology.com
866-954-4489
04-28-26

Project: _____

Company: _____

Location: _____ Fixture Type: _____

SPEC #: **EU543291**

Approved On: _____ Approved By: _____

Multiples LED Diffused / Remodel Housing By Eurofase



Description

Multiples LED Diffused Downlight with Remodel Housing is constructed of 18 gauge powder coated steel. Includes adjustable mounting clips suitable for 1/2 inch and 5/8 inch drywall. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. Available in White, Black or Platinum trim finish with a frosted glass lens. 120 degree beam angle. ETL listed. May be converted to a Non-IC new construction housing with mounting plate. NOTE: 6-Light Not Available In Black.

Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	White
WATTAGE	28.8W
DIMMER	Standard 120V
DIMENSIONS	10.5"W x 6.5"H x 6.13"D
INTEGRATED LED MODULE	2 x LED/14.4W/120V LED
COUNTRY OF ORIGIN	China

Technical Information

APERTURE SIZE	6.000"
APERTURE SHAPE	Rectangular
HOUSING HEIGHT	7"
HOUSING TYPE	Remodel NON IC
CEILING TYPE	Drywall with Trim
LAMP LIFE	50000 hours
BEAM ANGLE	120°
COLOR RENDERING	80 CRI
LAMP COLOR	3000K
LUMENS/WATT	163.89
LUMINOUS FLUX	2360 lumens



Shown in white

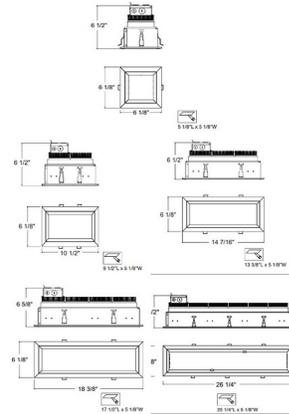

CLICK TO VIEW PRODUCT

Notes: