



### BRAND

Eurofase

### DESCRIPTION


The TE134BLED 7 Inch Aperture 4-Light Square Non-IC Remodel Housing is constructed of 18 gauge powder coated steel and features adjustable mounting clips suitable for 1/2 inch and 5/8 inch drywall. Non-IC designation requires that insulation be kept a minimum of 3 inches away from housing. Includes adjustable 4-light trim made of extruded aluminum available in a powder coat White trim with a White or Black reflector, or a powder coat Black or Platinum trim with a Black reflector. Includes 4X26 watt, 120 volt LED module with 20 or 40 degree beam angle in 3000K, 3500K or 4000K color temperature, 90+CRI, 4X2500 lumens. 50,000 hour average lamp life. 0-20 degree horizontal adjustment. Class 2 dimmable constant current driver included. Driver box mates to fixture by 24 inch flexible BX cable and has one 1/2 inch and two 3/4 inch knockouts for through branch wiring. Dimmable with a TRIAC dimmer, sold separately. ETL listed. Fixture: 13.38 inch square x 7 inch height. 12.75 inch square cutout. Can be converted to a Non-IC new construction housing with a new construction mounting plate, sold separately.



TRIM COLOR	N/A
BODY FINISH	Platinum Trim / Black Reflector
WATTAGE	104W
DIMMER	Low Voltage Electronic
DIMENSIONS	13.38"W x 7"H x 13.38"D
INTEGRATED LED MODULE	
LAMP	4 x LED/26W/120V LED

#### Technical Information

LUMINOUS FLUX	10000 lumens
LUMENS/WATT	384.62
LAMP COLOR	3000K
COLOR RENDERING	90 CRI
BEAM ANGLE	40°
LAMP LIFE	50000 hours
FUNCTION	Adjustable Accent
CEILING TYPE	Drywall with Trim
HOUSING TYPE	Remodel NON IC
HOUSING HEIGHT	7"
SPEC #	EU543590

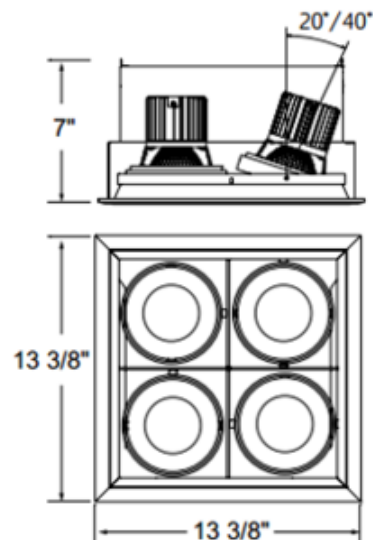

12 3/4"L x 12 3/4"W

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE