

# Lightology

lightology.com  
866-954-4489  
05-17-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **EU543617**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## 4IN LED Multiples Trim with Remodel Housing By Eurofase



### Description

The 6 Inch Aperture LED Remodel Housing is Non-IC rated and requires that insulation be kept a minimum of 3 inches away from housing. Includes adjustable 1, 2, 3 or 4-light trim in a powder coat White trim with a Black reflector, or a powder coat Black trim with a Black reflector. 0-20 degree horizontal adjustment. 20 degree or 40 degree beam angle options. Class 2 dimmable constant current driver with driver box included. Dimmable with a TRIAC dimmer, sold separately. Can be converted to a Non-IC new construction housing with multiples mounting plate or IC new construction housing, sold separately.

### Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	White Trim / Black Reflector
WATTAGE	15W
DIMMER	Standard 120V
DIMENSIONS	6.19"W x 5.88"H x 6.19"D
INTEGRATED LED MODULE	1 x LED/15W/120V LED
COUNTRY OF ORIGIN	China

### Technical Information

APERTURE SIZE	6.000"
APERTURE SHAPE	Square
HOUSING HEIGHT	6"
HOUSING TYPE	Remodel NON IC
CEILING TYPE	Drywall with Trim
FUNCTION	Adjustable Accent
LAMP LIFE	50000 hours
BEAM ANGLE	20°
COLOR RENDERING	90 CRI
LAMP COLOR	3000K
LUMENS/WATT	86.00
LUMINOUS FLUX	1290 lumens



Shown in white trim / black reflector

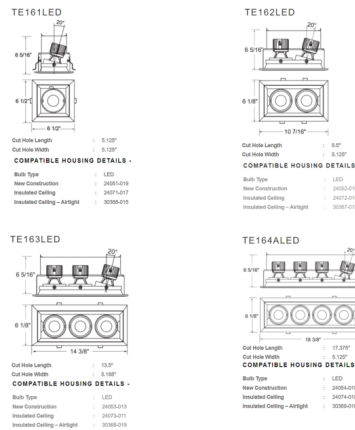

CLICK TO VIEW PRODUCT

Notes: