

Lightology

lightology.com
866-954-4489
05-17-26

Project: _____

Company: _____

Location: _____ Fixture Type: _____

SPEC #: **EUF543835**

Approved On: _____ Approved By: _____

4IN LED Multiples Trimless with Remodel Housing By Eurofase



Description

The 4 Inch Aperture Multiples Trimless Non-IC Remodel Housing is Non-IC rated and requires that insulation be kept a minimum of 3 inches away from housing. Includes a 1, 2 or 3-light adjustable flange made of extruded aluminum available in Black or White. Steel mesh plate included. Perforated perimeter of mesh plate allows mud to bond to mounting surface leaving a seamless finish in the ceiling. Includes LED module with 20 or 40 degree beam angle. 0-20 degree horizontal adjustment. Class 2 dimmable constant current driver included, driver box, and mesh plate included. Dimmable with a TRIAC dimmer, sold separately. ETL listed. Note: Can be converted to a Non-IC new construction housing with a new construction mounting plate, sold separately.

Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	White
WATTAGE	15W
DIMMER	Standard 120V
DIMENSIONS	4"W x 4.75"H x 4"D
INTEGRATED LED MODULE	1 x LED/15W/120V LED
COUNTRY OF ORIGIN	China

Technical Information

APERTURE SIZE	4.000"
APERTURE SHAPE	Square
HOUSING HEIGHT	5"
HOUSING TYPE	Remodel NON IC
CEILING TYPE	Drywall Trimless/Flush
FUNCTION	Adjustable Accent
LAMP LIFE	50000 hours
BEAM ANGLE	20°
COLOR RENDERING	90 CRI
LAMP COLOR	3000K
LUMENS/WATT	86.00
LUMINOUS FLUX	1290 lumens



Shown in white

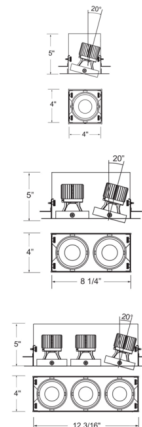

CLICK TO VIEW PRODUCT

Notes: