

Lightology

lightology.com
866-954-4489
05-24-26

Project: _____

Company: _____

Location: _____ Fixture Type: _____

SPEC #: **EU543846**

Approved On: _____ Approved By: _____

4IN LED Multiples Trimless with Remodel Housing By Eurofase



Description

The 4 Inch Aperture Multiples Trimless Non-IC Remodel Housing is Non-IC rated and requires that insulation be kept a minimum of 3 inches away from housing. Includes a 1, 2 or 3-light adjustable flange made of extruded aluminum available in Black or White. Steel mesh plate included. Perforated perimeter of mesh plate allows mud to bond to mounting surface leaving a seamless finish in the ceiling. Includes LED module with 20 or 40 degree beam angle. 0-20 degree horizontal adjustment. Class 2 dimmable constant current driver included, driver box, and mesh plate included. Dimmable with a TRIAC dimmer, sold separately. ETL listed. Note: Can be converted to a Non-IC new construction housing with a new construction mounting plate, sold separately.

Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Black
WATTAGE	30W
DIMMER	Standard 120V
DIMENSIONS	8.25"W x 4.75"H x 4"D
INTEGRATED LED MODULE	2 x LED/15W/120V LED
COUNTRY OF ORIGIN	China

Technical Information

APERTURE SIZE	4.000"
APERTURE SHAPE	Rectangular
HOUSING HEIGHT	5"
HOUSING TYPE	Remodel NON IC
CEILING TYPE	Drywall Trimless/Flush
FUNCTION	Adjustable Accent
LAMP LIFE	50000 hours
BEAM ANGLE	20°
COLOR RENDERING	90 CRI
LAMP COLOR	3000K
LUMENS/WATT	172.00
LUMINOUS FLUX	2580 lumens



Shown in black

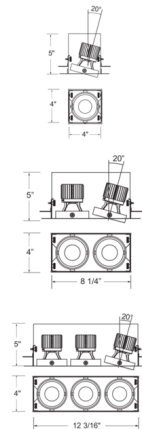

CLICK TO VIEW PRODUCT

Notes: