



BRAND

PureEdge Lighting

DESCRIPTION

Sun3C 3 Inch Square LED ceiling recessed downlight includes a 12VAC 9.5 system watts/7 LED watt Warm White 2858K color temperature LED, 85CRI, 46 lumens per watt/322 lumens total. Features a 16 degree precise focus and tempered glass lens with marine-grade aluminum beveled edge trim. Available in 16, 23, 36 and 47 degree beam options. Finish in Satin Aluminum. 70 percent lumen maintenance based on 50,000 hours of operation. Perfect for installation in ceilings with a low clearance (3.2 inch depth). Sun3C is rated for outdoor, ocean front, wet location, shower, or indoor applications. Dimmable with a low voltage electronic dimmer. Dims to 12 percent with Lutron Diva DVELV-300P and Lutron Skylark SELV-300P, and 20 percent with Lutron Maestro MAELV-600P. ETL listed. 3.3 inch width x 3.3 inch depth x 3.3 inch height. Fixture includes a 5 year warranty. Sun3C is constant voltage fixture and it is listed to be used only in ceiling applications and should not be used in floor or wall applications which will damage the fixture and void the warranty. For floor or wall applications use Sun3. A complete fixture consists of a housing and trim. Required Sun3-HS new construction IC rated housing with dimmable electronic power supply included, dimmer control and optional accessories sold separately.




Shown in: Satin Aluminum

TRIM COLOR	N/A
BODY FINISH	Satin Aluminum
WATTAGE	7W
DIMMER	Low Voltage Electronic
DIMENSIONS	3.3"W x 3.3"H x 3.3"D
LED MODULE INCLUDED	
LAMP	LED/7W/12V LED

Technical Information

LUMINOUS FLUX	322 lumens
LUMENS/WATT	46.00
LAMP COLOR	2858 K
COLOR RENDERING	85 CRI
BEAM ANGLE	47°
LAMP LIFE	50000 hours
FUNCTION	Shower/Wet Location
APERTURE SHAPE	Square

ITEM NUMBER EDG57686

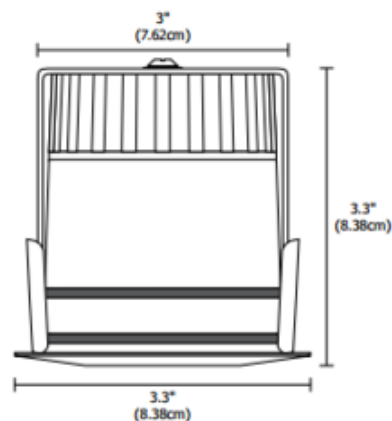

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE