

# Lightology

lightology.com  
866-954-4489  
08-20-25

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **EDG613214**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Zipp Suspension with Remote Power/2IN End Feed Canopy

By PureEdge Lighting



### Description

Zipp Downlight Suspension with remote power supply is a linear LED fixture that offers spot-free, direct light in a clean, contemporary style. Finish in Satin Nickel, Chrome, White or Satin Black with Satin Nickel hardware. Available with 4.4 watts per foot in increments from 36 to 420 inches, a diffused white lens with 100 degree beam spread or clear frosted lens with 60 degree beam spread, and optional black or white louver for adjustability, Zipp is available in ten color temperature options. Product is built to order. Note: Canopy mounts to a standard junction box either using the PS-60L-ELV-24VDC (60 Watt 24 Volt DC Power Supply) which fits inside junction box, or from a 24VDC remote Universal (UNI) power supply. Universal dimming with UNI power supply (TRIAC/ELV/0-10V). ELV dimming with PS-60L-ELV power supply. Power supply, dimmer control, and optional accessories sold separately. Note: Includes a 2.8 inch square canopy and adjustable 12 foot coaxial and aircraft cables.

### Specifications


COLOR . . . . . Clear / Black Louver  
BODY FINISH . . . . . Chrome  
WATTAGE . . . . . 20W  
DIMMER . . . . . Low Voltage Electronic  
DIMENSIONS . . . . . 48"L x 0.7"W x 0.7"H  
INTEGRATED LED MODULE . . . . . 4 x LED/5W/24V LED  
COUNTRY OF ORIGIN . . . . . United States

### Technical Information

LAMP LIFE . . . . . 50000 hours  
BEAM ANGLE . . . . . 60°  
COLOR RENDERING . . . . . 95 CRI  
LAMP COLOR . . . . . 3000K  
LUMENS/WATT . . . . . 80.80  
LUMINOUS FLUX . . . . . 404 lumens



Shown in chrome / clear / black louver

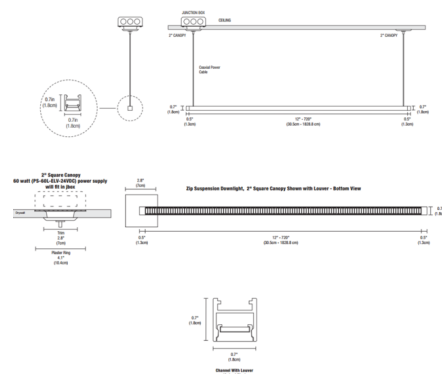

CLICK TO VIEW PRODUCT

Notes: