



BRAND Visual Comfort Architectural

DESCRIPTION

3 Inch Round 90CRI Flangeless Fixed Ultra Shallow Downlight IC AirTight New Construction Housing for use with 3 inch round flangeless trims. Supplied with LED module in three color temperature options and Warm Dim (3000K-1800K). Available with 18, 25 or 40 degree beam angle options. 3 7/8 inch ceiling cutout. Suitable for wet locations with shower trim. Includes a 120-277V Universal driver dimmable with standard reverse-phase, forward-phase, TRIAC, and 0-10V dimming. Note: A complete fixture requires a housing and flangeless trim, sold separately.




Shown in: Black

TRIM COLOR	N/A
BODY FINISH	Black
WATTAGE	17W
DIMMER	Low Voltage Electronic
DIMENSIONS	17.5"W x 2"H x 11.5"D
INTEGRATED LED MODULE	
LAMP	1 x LED/17W/120-277V LED

Technical Information

LUMINOUS FLUX	1450 lumens
LUMENS/WATT	85.29
LAMP COLOR	2700K
COLOR RENDERING	90 CRI
BEAM ANGLE	25°
LAMP LIFE	50000 hours
FUNCTION	Downlight
CEILING TYPE	Drywall Trimless/Flush
HOUSING TYPE	New construction IC Airtight
SPEC #	ELE614165

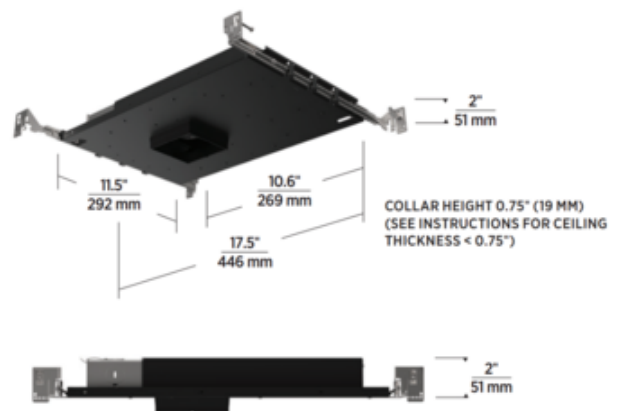

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE