

# Lightology

lightology.com  
866-954-4489  
05-17-26

Project: \_\_\_\_\_

Company: \_\_\_\_\_

Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_

SPEC #: **ELE614211**

Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Element 3IN RD Wood Ceiling Ultra Shallow Downlight Housing

By Visual Comfort Architectural



### Description

3 Inch Round 90CRI Fixed Downlight Ultra Shallow IC Airtight or Chicago Plenum New Construction Housing for Wood Ceilings. Ships with an adjustable trim adapter that inserts into the housing aperture and allows standard flangeless trims to achieve a truly flangeless, flush ceiling appearance. Includes LED module with 2700K, 3000K, 3500K, or Warm Dim (3000K-1800K) color temperature and 18, 25 or 40 degree beam angle options. 3 7/8 inch ceiling opening. Suitable for damp locations. Suitable for wet locations with shower trim. Includes a 120-277V Universal driver dimmable with standard reverse-phase, forward-phase, TRIAC, and 0-10V dimming. Note: A complete fixture requires a housing and trim, sold separately.

### Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Black
WATTAGE	17W
DIMMER	Low Voltage Electronic
DIMENSIONS	17.5"W x 2"H x 11.5"D
INTEGRATED LED MODULE	1 x LED/17W/120-277V LED

### Technical Information

APERTURE SHAPE	Round
HOUSING HEIGHT	2"
HOUSING TYPE	New construction IC Airtight
CEILING TYPE	Wood
FUNCTION	Downlight
LAMP LIFE	50000 hours
BEAM ANGLE	18°
COLOR RENDERING	90 CRI
LAMP COLOR	2700K
LUMENS/WATT	85.29
LUMINOUS FLUX	1450 lumens



Shown in black

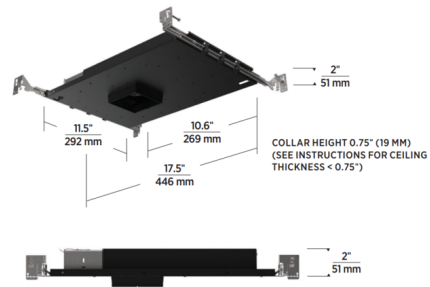

CLICK TO VIEW PRODUCT

Notes: