Lightology

lightology.com
866-954-4489
11-09-26

Project:

Company:

Location: Fixture Type:

SPEC #: **ELE614250**

Approved On: Approved By:

Element 3IN SQ Flangeless Downlight Ultra Shallow Housing


By Visual Comfort Architectural

Description

The 3 Inch Square 90CRI Flangeless Fixed Ultra Shallow IC AirTight New Construction or Chicago Plenum Housing is designed for use with square flangeless trims. Supplied with a high output 17 watt LED module in three color temperature options and Warm Dim (3000K-1800K). Available with 18, 25, 40 or 60 degree beam angle options. 3 7/8 inch ceiling cutout. Suitable for damp locations. Suitable for wet locations with shower trim. Includes a 120-277V Universal driver dimmable with standard reverse-phase, forward-phase, TRIAC, and 0-10V dimming. Note: A complete fixture requires a housing and trim, sold separately.



Shown in black

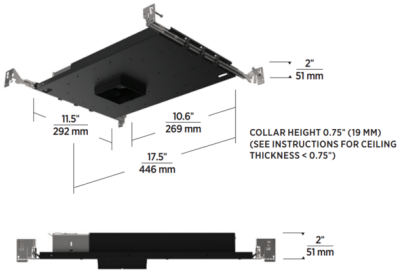

Specifications

REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Black
WATTAGE	16W
DIMMER	Low Voltage Electronic
DIMENSIONS	17.5"W x 2"H x 11.5"D
INTEGRATED LED MODULE	1 x LED/16W/120-277V LED

Technical Information

APERTURE SHAPE	Square
HOUSING HEIGHT	2"
HOUSING TYPE	New construction IC Airtight
CEILING TYPE	Drywall Trimless/Flush
FUNCTION	Downlight
LAMP LIFE	50000 hours
BEAM ANGLE	18°
COLOR RENDERING	90 CRI
LAMP COLOR	2700K
LUMENS/WATT	90.00
LUMINOUS FLUX	1440 lumens

CLICK TO VIEW PRODUCT

Notes: