

Lightology

lightology.com
866-954-4489
05-24-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **ELE614250**
 Approved On: _____ Approved By: _____

Element 3IN SQ Flangeless Downlight Ultra Shallow Housing By Visual Comfort Architectural



Description

The 3 Inch Square 90CRI Flangeless Fixed Ultra Shallow IC AirTight New Construction or Chicago Plenum Housing is designed for use with square flangeless trims. Supplied with a high output 17 watt LED module in three color temperature options and Warm Dim (3000K-1800K). Available with 18, 25, 40 or 60 degree beam angle options. 3 7/8 inch ceiling cutout. Suitable for damp locations. Suitable for wet locations with shower trim. Includes a 120-277V Universal driver dimmable with standard reverse-phase, forward-phase, TRIAC, and 0-10V dimming. Note: A complete fixture requires a housing and trim, sold separately.

Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Black
WATTAGE	16W
DIMMER	Low Voltage Electronic
DIMENSIONS	17.5"W x 2"H x 11.5"D
INTEGRATED LED MODULE	1 x LED/16W/120-277V LED

Technical Information

APERTURE SHAPE	Square
HOUSING HEIGHT	2"
HOUSING TYPE	New construction IC Airtight
CEILING TYPE	Drywall Trimless/Flush
FUNCTION	Downlight
LAMP LIFE	50000 hours
BEAM ANGLE	18°
COLOR RENDERING	90 CRI
LAMP COLOR	2700K
LUMENS/WATT	90.00
LUMINOUS FLUX	1440 lumens



Shown in black

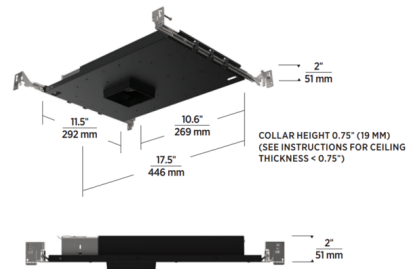

CLICK TO VIEW PRODUCT

Notes: