

Lightology

lightology.com
866-954-4489
09-17-25

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **ELE614298**
Approved On: _____ Approved By: _____

Element 3IN SQ Wood Ceiling Downlight Ultra Shallow Housing

By Visual Comfort Architectural



Description

3 Inch Square 90CRI Fixed Downlight IC AirTight New Construction or Chicago Plenum Housing for Wood Ceilings. Ships with an adjustable trim adapter that inserts into the housing aperture and allows standard flangeless trims to achieve a truly flangeless, flush ceiling appearance. Includes LED module with 2700K, 3000K, 3500K, or Warm Dim (3000K-1800K) color temperature and 18, 25 or 40 degree beam angle options. 3 7/8 inch ceiling opening. Suitable for damp locations. Suitable for wet locations with shower trim. Includes a 120-277V Universal driver dimmable with standard reverse-phase, forward-phase, TRIAC, and 0-10V dimming. Note: A complete fixture requires a housing and trim, sold separately.

Specifications


REFLECTOR/BAFFLE COLOR N/A
BODY FINISH Black
WATTAGE 17W
DIMMER Low Voltage Electronic
DIMENSIONS 17.5"W x 2"H x 11.5"D
INTEGRATED LED MODULE 1 x LED/17W/120-277V LED

Technical Information

APERTURE SHAPE Square
HOUSING HEIGHT 2"
HOUSING TYPE New construction IC Airtight
CEILING TYPE Wood
FUNCTION Downlight
LAMP LIFE 50000 hours
BEAM ANGLE 18°
COLOR RENDERING 90 CRI
LAMP COLOR 2700K
LUMENS/WATT 85.29
LUMINOUS FLUX 1450 lumens



Shown in black

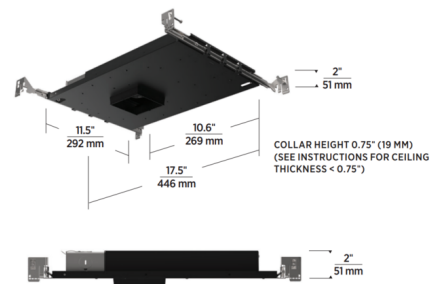

CLICK TO VIEW PRODUCT

Notes: