



BRAND

Visual Comfort Architectural

DESCRIPTION

3 Inch Square 90CRI Fixed Downlight IC AirTight New Construction or Chicago Plenum Housing for Wood Ceilings. Ships with an adjustable trim adapter that inserts into the housing aperture and allows standard flangeless trims to achieve a truly flangeless, flush ceiling appearance. Includes LED module with 2700K, 3000K, 3500K, or Warm Dim (3000K-1800K) color temperature and 18, 25 or 40 degree beam angle options. 3 7/8 inch ceiling opening. Suitable for damp locations. Suitable for wet locations with shower trim. Includes a 120-277V Universal driver dimmable with standard reverse-phase, forward-phase, TRIAC, and 0-10V dimming. Note: A complete fixture requires a housing and trim, sold separately.




Shown in: Black

TRIM COLOR	N/A
BODY FINISH	Black
WATTAGE	17W
DIMMER	Low Voltage Electronic
DIMENSIONS	17.5"W x 2"H x 11.5"D
INTEGRATED LED MODULE	
LAMP	1 x LED/17W/120-277V LED

Technical Information

LUMINOUS FLUX	1450 lumens
LUMENS/WATT	85.29
LAMP COLOR	2700K
COLOR RENDERING	90 CRI
BEAM ANGLE	25°
LAMP LIFE	50000 hours
FUNCTION	Downlight
CEILING TYPE	Wood
HOUSING TYPE	New construction IC Airtight
SPEC #	ELE614300

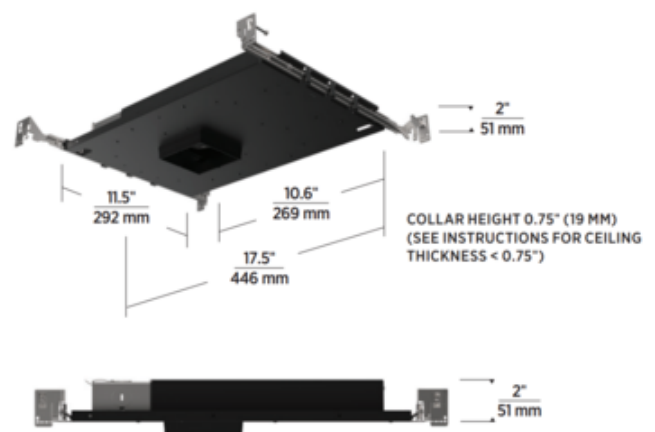

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE