

Lightology

lightology.com
866-954-4489
07-29-26

Project: _____
Company: _____
Location: _____ Fixture Type: _____
SPEC #: **ELE614436**
Approved On: _____ Approved By: _____

Element 2 inch RD Flangeless Adj New Construction IC Housing

By Visual Comfort Architectural



Description

The 2 Inch Round Flangeless Adjustable Downlight and Wall Wash IC Airtight New Construction Housing is constructed of heavy gauge cold rolled steel with a durable Black powder coat finish. IC designation allows insulation to be in direct contact with housing. This specification grade housing features an integral 12 watt (average 930 lumens) or 17 watt (average 1250 lumens) LED module in three color temperature options with 20, 30, 40 or 60 degree beam angle, or Warm Dim (3000K to 1800K) in low output 12 watt (average 850 lumens) and 20, 30, 40 or 60 degree beam angle. Lockable hot-aiming 0-40 degree tilt, 361 degree rotation, high-low positioning, and 45 degree collar rotation. 2.75 inch ceiling cutout, suitable for ceilings up to 2 inch thick. ETL listed. Suitable for damp locations. Title 24 compliant. Rated for wet locations when used with shower trim. 5 year warranty. Dimmable down to 5 percent with an electronic low voltage (ELV) or 1 percent with a 0-10V dimmer, sold separately. A complete fixture consists of a housing and trim, sold separately. NOTE: WARM DIM OPTION AVAILABLE IN LOW OUTPUT 12 WATT ONLY.

Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Black
WATTAGE	12W
DIMMER	Low Voltage Electronic
DIMENSIONS	12"L x 10"W x 5.25"H
INTEGRATED LED MODULE	1 x LED/12W/120V LED

Technical Information

APERTURE SIZE	2.000"
APERTURE SHAPE	Round
HOUSING HEIGHT	6"
HOUSING TYPE	New construction IC Airtight
CEILING TYPE	Drywall Trimless/Flush
LAMP LIFE	50000 hours
BEAM ANGLE	40°
COLOR RENDERING	90 CRI
LAMP COLOR	3000K Warm Dim
LUMENS/WATT	70.83
LUMINOUS FLUX	850 lumens



Shown in black

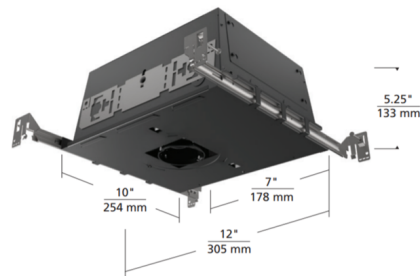

CLICK TO VIEW PRODUCT

Notes: