

# Lightology

lightology.com  
866-954-4489  
04-27-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **ELE614530**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Element 2 inch SQ Flangeless Adj New Construction IC Housing By Visual Comfort Architectural



### Description

The 2 Inch Square Flangeless Adjustable Downlight and Wall Wash IC Airtight New Construction Housing. IC designation allows insulation to be in direct contact with housing. This specification grade housing features an integral 12 watt (average 930 lumens) or 17 watt (average 1250 lumens) LED module in three color temperature options with 20, 30, 40 or 60 degree beam angle, or Warm Dim (3000K to 1800K) in low output 12 watt (average 850 lumens) and 20, 30, 40 or 60 degree beam angle. Lockable hot-aiming 0-40 degree tilt, 361 degree rotation, high-low positioning, and 45 degree collar rotation. 2.75 inch ceiling cutout, suitable for ceilings up to 2 inch thick. ETL listed. Suitable for damp locations. Title 24 compliant. Rated for wet locations when used with shower trim. 5 year warranty. Standard reverse-phase, forward-phase, TRIAC, and 0-10V dimming (down to 1%), sold separately. A complete fixture requires a housing and trim, sold separately. Note: 17 Watt not available for Warm Dim option.

### Specifications


REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	Black
WATTAGE	17W
DIMMER	Low Voltage Electronic
DIMENSIONS	12"L x 10"W x 5.25"H
INTEGRATED LED MODULE	1 x LED/17W/120V LED

### Technical Information

APERTURE SIZE	2.000"
APERTURE SHAPE	Square
HOUSING HEIGHT	6"
HOUSING TYPE	New construction IC Airtight
CEILING TYPE	Drywall Trimless/Flush
LAMP LIFE	50000 hours
BEAM ANGLE	20°
COLOR RENDERING	90 CRI
LAMP COLOR	2700K
LUMENS/WATT	73.53
LUMINOUS FLUX	1250 lumens



Shown in black

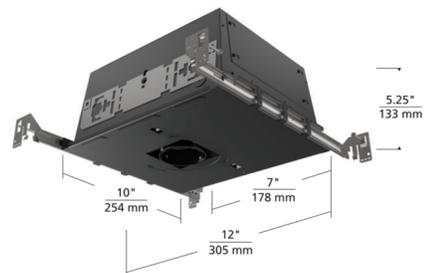

IC AIRTIGHT/ CHICAGO PLENUM  
FLANGED / WOOD CEILING / FLANGELESS CEILING MOUNT



CLICK TO VIEW PRODUCT

Notes: