



BRAND

Visual Comfort Architectural

DESCRIPTION

The 2 Inch Square Flangeless Adjustable Downlight and Wall Wash IC Airtight New Construction Housing. IC designation allows insulation to be in direct contact with housing. This specification grade housing features an integral 12 watt (average 930 lumens) or 17 watt (average 1250 lumens) LED module in three color temperature options with 20, 30, 40 or 60 degree beam angle, or Warm Dim (3000K to 1800K) in low output 12 watt (average 850 lumens) and 20, 30, 40 or 60 degree beam angle. Lockable hot-aiming 0-40 degree tilt, 361 degree rotation, high-low positioning, and 45 degree collar rotation. 2.75 inch ceiling cutout, suitable for ceilings up to 2 inch thick. ETL listed. Suitable for damp locations. Title 24 compliant. Rated for wet locations when used with shower trim. 5 year warranty. Standard reverse-phase, forward-phase, TRIAC, and 0-10V dimming (down to 1%), sold separately. A complete fixture requires a housing and trim, sold separately. Note: 17 Watt not available for Warm Dim option.




Shown in: Black

TRIM COLOR	N/A
BODY FINISH	Black
WATTAGE	17W
DIMMER	Low Voltage Electronic
DIMENSIONS	12" L x 10" W x 5.25" H
INTEGRATED LED MODULE	
LAMP	1 x LED/17W/120V LED

Technical Information

LUMINOUS FLUX	1250 lumens
LUMENS/WATT	73.53
LAMP COLOR	2700K
COLOR RENDERING	90 CRI
BEAM ANGLE	20°
LAMP LIFE	50000 hours
CEILING TYPE	Drywall Trimless/Flush
HOUSING TYPE	New construction IC Airtight
HOUSING HEIGHT	6"

SPEC #	ELE614530
--------	-----------

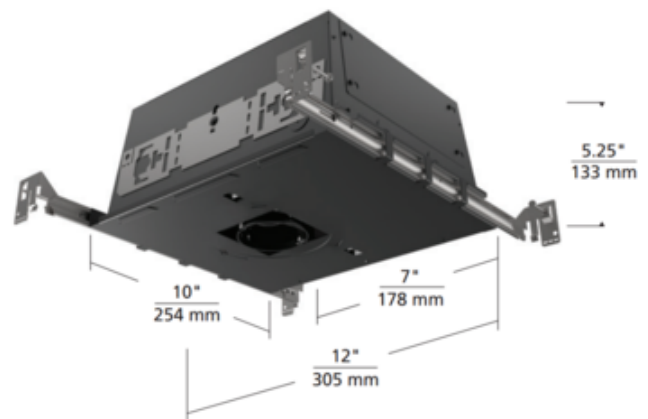

IC AIRTIGHT/ CHICAGO PLENUM
FLANGED / WOOD CEILING / FLANGELESS CEILING MOUNT

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE