

# Lightology

lightology.com  
866-954-4489  
07-06-25

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **EMR615350**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Fusion Rectangle Lighted Mirror

By Electric Mirror



### Description

The Fusion Lighted Mirror is designed to maximize direct illumination. Ideal for precision tasks such as makeup application and shaving. White powder coated chassis for finished side view. Corrosion resistant DuraMirror glass. Choice of standard control or with Ava dimming. Ava Smart Look technology features tunable white LED lights that allow you to select the color temperature. Select between 6500K for a day of outdoor activities, 4600K for your daily routine, or 2700K for a night out on the town. Tap to Cycle through 2700K, 4600K, 6500K, Night Glow and Off. At every level, hold to dim down to 10%. After one hour of non-use, Energy Save Mode automatically dims lights to 10%. Available in four sizes. Note: The Fusion mirror must be installed in the W x H (width x height) orientation as listed; it cannot be installed in any other direction.

### Specifications


COLOR . . . . . Mirror  
BODY FINISH . . . . . N/A  
WATTAGE . . . . . 54W  
DIMMER . . . . . Standard 120V  
DIMENSIONS . . . . . 24"W x 36"H x 1.75"D  
INTEGRATED LED MODULE . . . . . 1 x LED/54W/120-277V LED  
COUNTRY OF ORIGIN . . . . . United States

### Technical Information

LAMP LIFE . . . . . 52000 hours  
COLOR RENDERING . . . . . 90 CRI  
LAMP COLOR . . . . . 3000K  
LUMENS/WATT . . . . . 130.39  
LUMINOUS FLUX . . . . . 7041 lumens



Shown in mirror

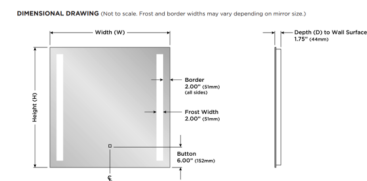

Base Model*	Model Type	Dimensions	Initial Lumens/Picture	Power Requirements
FUS-2436	Standard	24" W x 36" H x 1.75" D (609mm W x 914mm H x 44mm D)	7041	120-277VAC, 54W
FUS-2436-AK	With Ava**	(609mm W x 914mm H x 44mm D)	2,850	120 or 277VAC, 54W
FUS-4836	Standard	48" W x 36" H x 1.75" D (1219mm W x 914mm H x 44mm D)	7041	120-277VAC, 54W
FUS-4836-AK	With Ava**	(1219mm W x 914mm H x 44mm D)	2,850	120 or 277VAC, 54W
FUS-6036	Standard	60" W x 36" H x 1.75" D (1524mm W x 914mm H x 44mm D)	7041	120-277VAC, 54W
FUS-6036-AK	With Ava**	(1524mm W x 914mm H x 44mm D)	2,850	120 or 277VAC, 54W



CLICK TO VIEW PRODUCT

Notes: