

# Lightology

lightology.com  
866-954-4489  
04-24-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **DLS621068**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Indirect Round Warm Dim Recessed Panel Light By DALS Lighting



### Description


The Indirect Round Warm Dim Recessed Panel Light offers indirect lighting with glare reduction. Includes a junction box with 120 volt integrated dimmable driver. IC designation allows for insulation to be in direct contact with housing. Features Warm Dim technology which dims from 3000K to 2200K to mimic incandescent light. Dome reflector with 360 degree wide beam angle. Can be daisy chained. TRIAC dimming (see attached manufacturer dimmer reference).

### Specifications

REFLECTOR/BAFFLE COLOR	N/A
BODY FINISH	White
WATTAGE	12W
DIMMER	Standard 120V
DIMENSIONS	6.75"W x 2"H
INTEGRATED LED MODULE	1 x LED/12W/120V LED
COUNTRY OF ORIGIN	China


### Technical Information

APERTURE SHAPE	Round
HOUSING HEIGHT	2"
HOUSING TYPE	Remodel IC Airtight
CEILING TYPE	Drywall with Trim
FUNCTION	Downlight
LAMP LIFE	50000 hours
BEAM ANGLE	360°
COLOR RENDERING	.80 CRI
LAMP COLOR	3000K Warm Dim
LUMENS/WATT	62.50
LUMINOUS FLUX	750 lumens

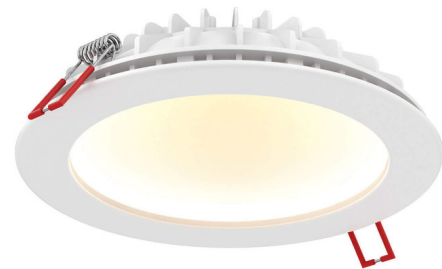


Shown in white

IND4-DW - 4" Indirect Recessed Light



IND6-DW - 6" Indirect Recessed Light



CLICK TO VIEW PRODUCT

Notes: