



### BRAND

PureEdge Lighting

### DESCRIPTION

Zipp Downlight Suspension with Power is a linear LED fixture that features even, direct light without LED spots. Zipp is available with one or two canopies in various increments from 36 to 480 inches and features a diffused white lens with 100 degree beam or clear frosted lens with 60 degree beam, optional black or white louver, a variety of finishes, three wattage options, and a spectrum of color temperature options. Warm Dim includes 5 LED watts per foot available in 2700K-2000K (27D) and 3000K-2000K (30D) color temperature. Unlike standard LEDs, Warm Dim LEDs are designed to shift to a warmer color temperature as they are dimmed, replicating the effects of incandescent and halogen light sources. 84 inch maximum length for Chrome finish. Supplied with adjustable 12 foot coaxial and aircraft cables. Includes one or two square end feed canopies which mounts to a standard junction box with a 120V/24VDC electronic low voltage LED power supply. Power supply wattage and canopy option dependent on length of fixture. Dimmable with an electronic low voltage dimmer, sold separately. Fixture includes a 5 year warranty. Optional accessories and dimmer control sold separately. Product is built to order. Note: Warm Dim available in 5 watt option only.




Shown in: Satin Nickel / White / White Louver

|                       |                        |
|-----------------------|------------------------|
| SHADE COLOR           | White / White Louver   |
| BODY FINISH           | Satin Nickel           |
| WATTAGE               | 28W                    |
| DIMMER                | Low Voltage Electronic |
| DIMENSIONS            | 48"L x 0.7"W x 0.7"H   |
| INTEGRATED LED MODULE |                        |
| LAMP                  | 4 x LED/24V LED        |

#### Technical Information

|                 |            |
|-----------------|------------|
| LUMINOUS FLUX   | 836 lumens |
| LUMENS/WATT     | 119.43     |
| LAMP COLOR      | 2700K      |
| COLOR RENDERING | 95 CRI     |
| BEAM ANGLE      | 100°       |

SPEC # EDG621374

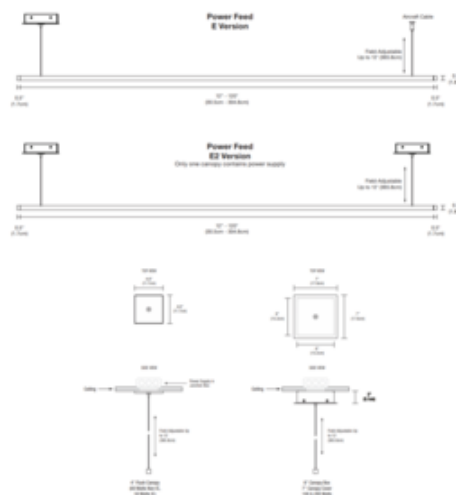

| CANOPY CHART |   |   |
|--------------|---|---|
| VERSION      | 2" or 4" FLUSH CANOPY<br>(800 WATT TO 800 WATT) | 6" SURFACE MOUNT CANOPY<br>(1000 WATT TO 1000 WATT) |
| 2W Lengths   | up to 240"                                      | 240" - 480"   |
| 5W Lengths   | up to 120"                                      | 120" - 240"   |
| 7W Lengths   | up to 80"                                       | 80" - 160"  |

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE