

Lightology

lightology.com
866-954-4489
04-25-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **EDG621440**
 Approved On: _____ Approved By: _____


Zipp Wave Linear Suspension/Remote Power/2IN Round Canopy

By PureEdge Lighting




Description

Add angles and dimensions to any space with the Zipp Wave Suspension Downlight with End Feed Canopy. Available with a 2 inch round canopy in a range of increments from 48 to 240 inches and features a white lens with 100 degree beam spread, optional adjustable white or black louver, multiple finishes, and a spectrum of color temperatures. Product is built to order. Note: Canopy mounts to a standard junction box either using the PS-60L-ELV-24VDC (60 Watt 24 Volt DC Power Supply) which fits inside junction box, or from a 24VDC remote Universal (UNI) power supply. Universal dimming with UNI power supply (TRIAC/ELV/0-10V). ELV dimming with PS-60L-ELV power supply. Power supply, dimmer control, and optional accessories sold separately. Note: Includes a 2.8 inch round canopy and adjustable 12 foot coaxial and aircraft cables. Additional aircraft cables are included for support when fixture exceeds 96 inches.

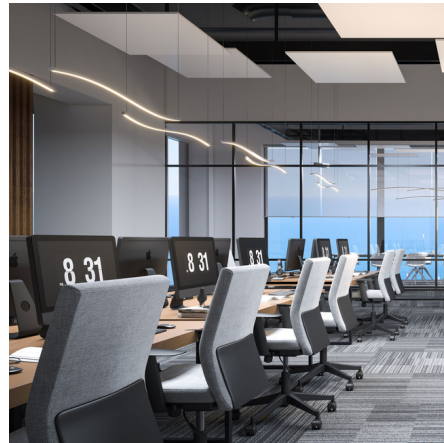

Shown in satin nickel / white lens

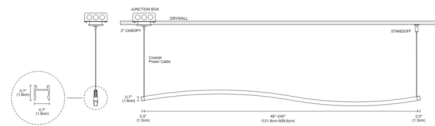

Specifications

COLOR	White Lens
BODY FINISH	Satin Nickel
WATTAGE	25W
DIMMER	Low Voltage Electronic
DIMENSIONS	60"L x 0.7"W x 0.7"H
INTEGRATED LED MODULE	5 x LED/5W/120V LED

Technical Information

LAMP LIFE	50000 hours
COLOR RENDERING	95 CRI
LAMP COLOR	2700K
LUMENS/WATT	211.00
LUMINOUS FLUX	1055 lumens



CLICK TO VIEW PRODUCT

Notes: