

# Lightology

lightology.com  
866-954-4489  
04-22-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **EDG624854**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## 2X100W 24VDC 2XK Tunable White DMX Power Supply

By PureEdge Lighting




### Description


The PSB-2X100W-24VDC-2XK Class 2 LED Power Supply accepts input voltage in a range of 120-277 volts AC and outputs 24 volts DC power up to 2X100 watts. The integrated Tunable White driver receives signals from CDMX1-2XK to control Tunable White color mixing and light intensity. Features short circuit and overload protection. For indoor applications only. To avoid overheating the power supply, install it in a ventilated remote location where air flows. Maintain proper spacing among power supplies when multiple power supplies are installed in the same remote location. Power Input: 120-277VAC, 50/60Hz. Power Output: Class 2, 24VDC, 2X4.16A at 2X100 watts maximum. Compatible Controllers: Tunable White Touch Controller (CDMX1-2XK), sold separately.



Shown in white

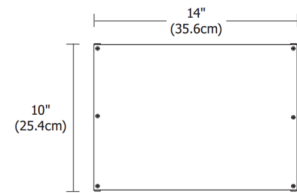

Top View

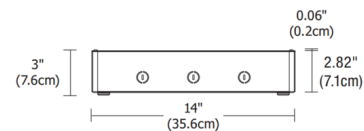

Side View

### Specifications

COLOR . . . . .	N/A
BODY FINISH . . . . .	White
WATTAGE . . . . .	100W
DIMMER . . . . .	N/A
DIMENSIONS . . . . .	14"W x 10"H x 3"D
BULB NOT INCLUDED . . . . .	N/A



CLICK TO VIEW PRODUCT

Notes: