



DESIGNER

Gregory Kay

BRAND

PureEdge Lighting

DESCRIPTION

Verge Ceiling Warm Dim Ceiling features an innovative design that recesses within 5/8 inch drywall without joist modification. Available in 1 foot increments up to 40 feet (20 feet at 5 watts) and is field-cuttable. Includes 5 watt per foot LED module of Warm Dim 27D (2700K-2200K) color temperature LED Soft Strip. The plaster-in aluminum extrusion features a 4 inch paintable backer plate and highlights ceiling perimeters while emitting smooth and continuous ambient illumination. System requires a remote Universal (UNI) power supply, sold separately. Included Components: Junction Box, Adjustable Mounting Bars, Backer Plate, Verge Ceiling Channel(s), Drywall Screws, LED Soft Strip and Lens(es). A VG-1RE-JBOX rough-in junction box is available to rough-in electrical before drywall installation (included and sold separately). ETL listed. Title 24 compliant when used with a Universal (UNI) power supply. Suitable for damp locations. Includes a 5-year pro-rated warranty. Required power supply, dimmer control, and optional mounting accessories sold separately. Product is built to order. Note: Limited quantities available.



Shown in: Aluminum


SHADE COLOR	N/A
BODY FINISH	Aluminum
WATTAGE	25W
DIMMER	Low Voltage Electronic
DIMENSIONS	60"L x 0.75"W x 4.13"H
INTEGRATED LED MODULE	
LAMP	5 x LED/24V LED

Technical Information

LUMINOUS FLUX	744 lumens
LUMENS/WATT	148.80
LAMP COLOR	2700K Warm Dim
COLOR RENDERING	92 CRI

SPEC #

EDG625078

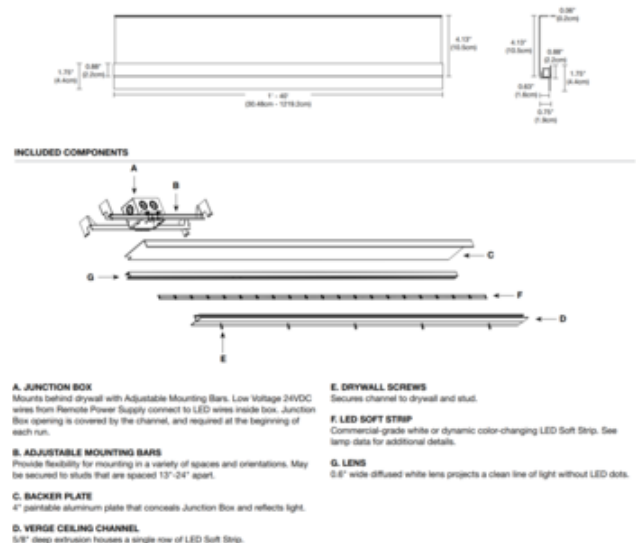

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE