

# Lightology

lightology.com  
866-954-4489  
08-04-25

Project: \_\_\_\_\_  
Company: \_\_\_\_\_  
Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
SPEC #: **EDG625078**  
Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Verge Ceiling 5W Warm Dim Plaster-In System

By PureEdge Lighting



### Description

Verge Ceiling Warm Dim Ceiling features an innovative design that recesses within 5/8 inch drywall without joist modification. Available in 1 foot increments up to 40 feet (20 feet at 5 watts) and is field-cuttable. Includes 5 watt per foot LED module of Warm Dim 27D (2700K-2200K) color temperature LED Soft Strip. The plaster-in aluminum extrusion features a 4 inch paintable backer plate and highlights ceiling perimeters while emitting smooth and continuous ambient illumination. System requires a remote Universal (UNI) power supply, sold separately. Included Components: Junction Box, Adjustable Mounting Bars, Backer Plate, Verge Ceiling Channel(s), Drywall Screws, LED Soft Strip and Lens(es). A VG-IRE-JBOX rough-in junction box is available to rough-in electrical before drywall installation (included and sold separately). ETL listed. Title 24 compliant when used with a Universal (UNI) power supply. Suitable for damp locations. Includes a 5-year pro-rated warranty. Required power supply, dimmer control, and optional mounting accessories sold separately. Product is built to order. Note: Limited quantities available.

### Specifications


COLOR . . . . . N/A  
BODY FINISH . . . . . Aluminum  
WATTAGE . . . . . 25W  
DIMMER . . . . . Low Voltage Electronic  
DIMENSIONS . . . . . 60"L x 0.75"W x 4.13"H  
INTEGRATED LED MODULE . . . . . 5 x LED/5W/24V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
COLOR RENDERING . . . . . 92 CRI  
LAMP COLOR . . . . . 2700K Warm Dim  
LUMENS/WATT . . . . . 148.80  
LUMINOUS FLUX . . . . . 744 lumens



Shown in aluminum

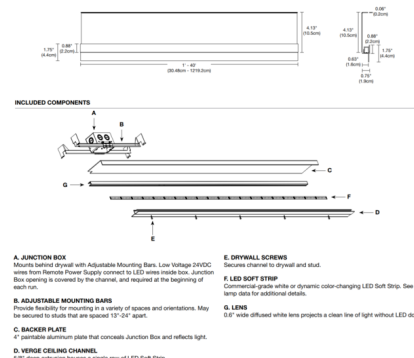

CLICK TO VIEW PRODUCT

Notes: