



DESIGNER

Gregory Kay

BRAND

PureEdge Lighting

DESCRIPTION

Verge Tunable White 2K4K Ceiling features a slim plaster-in aluminum channel with a 4 inch paintable aluminum backer plate. The channel highlights ceiling perimeters while emitting ambient illumination. Verge houses a single row of commercial grade LEDs available in Variable White 2000-4100K color temperature. Verge is sold in 5 foot increments up to 40 feet (20 feet for 5 watt) and may be field-cut to any length. The system requires a 24VDC 2XK remote power supply, sold separately. Requires two dimmers (one for 2000K and one for 4000K) or use Tunable White Controller, sold separately. Included components: Junction Box, Adjustable Mounting Bars, Verge Wall Channel(s), Backer Plate, Drywall Screws, LED Soft Strip, and Lens(es). A VG-IRE-JBOX rough-in junction box is available to rough-in electrical before drywall installation (included and sold separately). A VG-IRE-JBOX rough-in junction box is available to rough-in electrical before drywall installation (included and sold separately). ETL listed. Fixture includes a 5 year pro-rated warranty. Required power supply, dimmer control/controller, and optional mounting accessories sold separately. Product is built to order.



Shown in: Aluminum

SHADE COLOR	N/A
BODY FINISH	Aluminum
LAMP	5 x LED/5W/24V LED
WATTAGE	25W
DIMMER	Dimmable
DIMENSIONS	60"L x 0.75"W x 4.13"H


Technical Information

LUMINOUS FLUX	3720 lumens
LUMENS/WATT	744.00
LAMP COLOR	2 K
COLOR RENDERING	90 CRI

ITEM NUMBER EDG625158



INCLUDED COMPONENTS

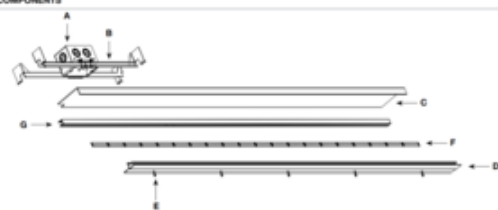

- A. JUNCTION BOX**
Mounts behind drywall with Adjustable Mounting Bars. Low Voltage 24VDC wires from Remote Power Supply connect to LED wires inside box. Junction Box opening is covered by the channel, and required at the beginning of each run.
- B. ADJUSTABLE MOUNTING BARS**
Provide flexibility for mounting in a variety of spaces and orientations. May be secured to studs that are spaced 12"-24" apart.
- C. BACKER PLATE**
4" paintable aluminum plate that conceals Junction Box and reflects light.
- D. VERGE CEILING CHANNEL**
5/8" deep extrusion houses a single row of LED Soft Strip.
- E. DRYWALL SCREWS**
Secures channel to drywall and stud.
- F. LED SOFT STRIP**
Commercial-grade white or dynamic color-changing LED Soft Strip. See lamp data for additional details.
- G. LENS**
5/8" wide diffused white lens projects a clean line of light without LED dots.

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE