Lightology

lightology.com
866-954-4489
11-09-26

Project:

Company:

Location: Fixture Type:

SPEC #: **EDG627891**


Approved On: Approved By:

Glide Glass Up/Down End Feed Suspension


By PureEdge Lighting

Description

Glide Glass Up/Down End Feed Suspension is a linear LED fixture that offers direct light in a clean, contemporary style. Offered with one or two canopies. Downlight features a diffused white lens with 100 degree beam spread and optional black or white louvers for adjustability. Uplight features a clear frosted 60 degree lens. Glass available in Black, White or Mirror. Channel widths sold in 12 inch increments from 36 to 120 inches with 7 (2 watts up/5 watts down), 10 (5 watts up/5 watts down), or 12 watts (5 watts up/7.5 watts down) per foot. Available in seven color temperature options including Warm Dim. Supplied with 12 feet of adjustable coaxial cables (fixtures exceeding 96 inch include additional aircraft cables). 120 volt input, 24VDC Class 2 output, electronic low voltage LED power supply included in canopy. Dimmable with an electronic low voltage dimmer: (Lutron Diva DVELV-300P, Lutron Skylark SELV-300P, Lutron Maestro MAELV-600 and Lutron Radio Ra 2, or Legrand Adorne ADTP703TU), sold separately. 5 year warranty. Product is built to order.

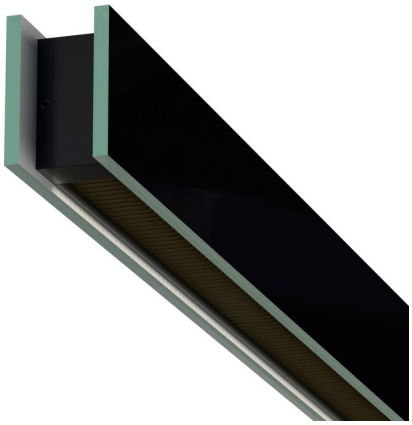

Shown in black glass / black louver

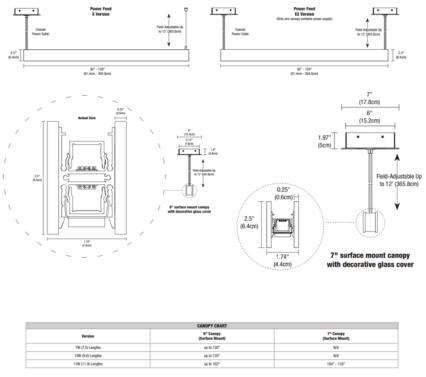

Specifications

COLOR	Black Louver
BODY FINISH	Black Glass
WATTAGE	63W
DIMMER	Low Voltage Electronic
DIMENSIONS	108"L x 1.74"W x 2.5"H
INTEGRATED LED MODULE	9 x LED/7W/120V LED

Technical Information

LAMP LIFE	50000 hours
COLOR RENDERING	95 CRI
LAMP COLOR	3000K
LUMENS/WATT	560.57
LUMINOUS FLUX	3924 lumens

CLICK TO VIEW PRODUCT

Notes: