

# Lightology

lightology.com  
866-954-4489  
04-03-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **EDG628878**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Glide Wood Up/Down Warm Dim Center Feed Suspension By PureEdge Lighting



### Description

Glide Wood Warm Dim Up/Down Center Feed Linear Suspension is a two-circuit system featuring both direct and indirect LED light. Available in 27D (2700K to 2000K) and 30D (3000K to 2000K) Warm Dim color temperature options with 10 LED watts per foot (5 watts up and 5 watts down). Offered in 12 inch increments from 36 to 120 inches. Available in Walnut, Cherry, White Oak, Espresso or Maple wood finish with 100 degree diffused white downlight lens, 60 degree clear frosted uplight lens, and optional black or white louvers. Includes rectangle canopy with 120V input/24VDC output Universal (UNI) LED power supply. Dimmable with an electronic low voltage (ELV), 0-10V, or Triac (magnetic) dimmer, sold separately. Supplied with 12 feet of adjustable coaxial cables (additional aircraft cables added for support when fixture exceeds 72 inch). Note: Product is built to order.

### Specifications


COLOR . . . . . No Louver  
 BODY FINISH . . . . . Wood Cherry  
 WATTAGE . . . . . 30W  
 DIMMER . . . . . Low Voltage Electronic  
 DIMENSIONS . . . . . 36"L x 1.74"W x 2.5"H  
 INTEGRATED LED MODULE . . . . . 3 x LED/10W/120V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
 COLOR RENDERING . . . . . 92 CRI  
 LAMP COLOR . . . . . 3000K Warm Dim  
 LUMENS/WATT . . . . . 170.70  
 LUMINOUS FLUX . . . . . 1707 lumens



Shown in wood cherry / no louver

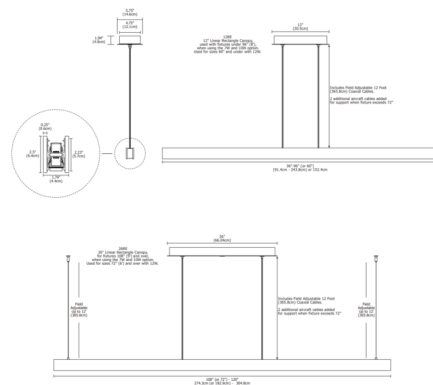

CLICK TO VIEW PRODUCT

Notes: