

Lightology

lightology.com
866-954-4489
04-25-26

Project: _____
 Company: _____
 Location: _____ Fixture Type: _____
 SPEC #: **EDG633733**
 Approved On: _____ Approved By: _____

Light Channel .3 Tunable White Surface Mount Complete By PureEdge Lighting



Description

The Light Channel .3 Tunable White Surface Mount Complete Fixture is a slim profile channel available in 12 inch increments up to 120 inches (see attached chart for actual lengths). Finish in Satin Aluminum with a diffused lens, or a clear lens for maximum light levels. Available in a 5 watt option with 2K4K Tunable White color temperature. Tunable White 2000K-4000K (2K4K) grants independent control and adjustment of color temperature and intensity from 2000K (Sunset) through 4000K (Cool White).
 Included components: Light Channel .3 Surface Mount Channel, Light Channel .3 Surface Mount Assembly, 24VDC LED Lazer Strip, Lens (clear or diffused), Light Channel Power Connector, Mounting Clips (included with every 2 feet of channel), and End Caps. Note: A DMX color changing power supply or 2XK 0-10V 2-Channel power supply is required and sold separately. 0-10V requires two dimmers --one for intensity and one for color temperature. DMX power supply must be used with PureEdge controller (CDMX1-2XK). Required power supply, dimmer control, and optional mounting accessories sold separately.

Specifications


COLOR Clear Lens
 BODY FINISH Satin Aluminum
 WATTAGE 5W
 DIMMER N/A
 DIMENSIONS 12"L x 0.7"W x 0.35"H
 INTEGRATED LED MODULE 1 x LED/5W/24V LED

Technical Information

LAMP LIFE 50000 hours
 COLOR RENDERING 90 CRI
 LAMP COLOR 2000K-4000K Tunable White
 LUMENS/WATT 46.20
 LUMINOUS FLUX 231 lumens




Shown in satin aluminum / clear lens

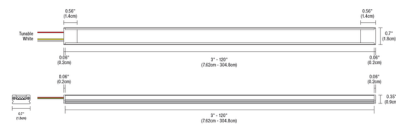

Length Chart: Actual lengths for Light Channel .3 Surface Mount

Number of Channels	Actual Length In (ft)	Number of Channels	Actual Length In (ft)	Number of Channels	Actual Length In (ft)	Number of Channels	Actual Length In (ft)
1	1.0	10	10.0	19	19.0	28	28.0
2	2.0	11	11.0	20	20.0	29	29.0
3	3.0	12	12.0	21	21.0	30	30.0
4	4.0	13	13.0	22	22.0	31	31.0
5	5.0	14	14.0	23	23.0	32	32.0
6	6.0	15	15.0	24	24.0	33	33.0
7	7.0	16	16.0	25	25.0	34	34.0
8	8.0	17	17.0	26	26.0	35	35.0
9	9.0	18	18.0	27	27.0	36	36.0

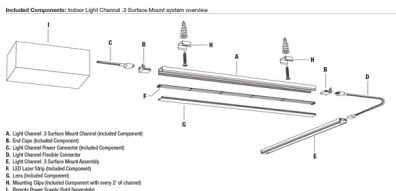

CLICK TO VIEW PRODUCT

Notes: _____