



DESIGNER

Gregory Kay

BRAND

PureEdge Lighting

DESCRIPTION

The Light Channel .3 Warm Dim Surface Mount is a slim profile channel available in 12 inch increments up to 120 inches. Finish in Satin Aluminum with a 61 degree diffused lens or a clear 26 degree lens for maximum light levels. Available in a 5 watt per foot option with Warm Dim 27D (2700K-2200K) or 30D (3000K-2200K) color temperature. Included components: Light Channel .3 Surface Mount Channel, Light Channel .3 Surface Mount Assembly, 96 inch solderless Snap & Light Power Connector (one per fixture), 24VDC LED Soft Strip, mounting clips (included with every 2 feet of channel), end caps, lens, and a 96 inch power cord. A remote Universal power supply (dimmable ELV/TRIAC/0-10V), sold separately. For indoor dry or damp locations. ETL listed. 5 year warranty. Product is built to order. Required power supply, dimmer control, and optional mounting accessories sold separately.



SHADE COLOR	Diffused Lens
BODY FINISH	Satin Aluminum
WATTAGE	5W
DIMMER	Low Voltage Electronic
DIMENSIONS	12"L x 0.7"W x 0.35"H
INTEGRATED LED MODULE	
LAMP	1 x LED/5W/24V LED


Technical Information

LUMINOUS FLUX	320 lumens
LUMENS/WATT	64.00
LAMP COLOR	2700K Warm Dim
COLOR RENDERING	95 CRI

SPEC # EDG633871



Included Components: Indoor Light Channel .3 Surface Mount system overview

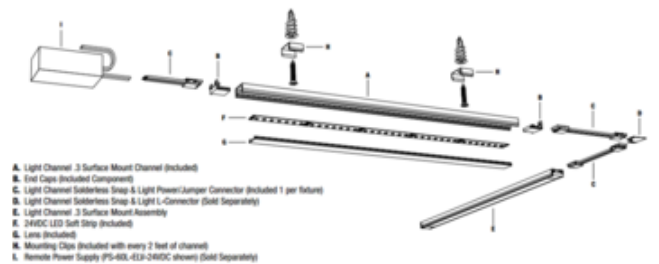

- A. Light Channel .3 Surface Mount Channel (Included)
- B. End Caps (Included Component)
- C. Light Channel Solderless Snap & Light Power/Jumper Connector (Included 1 per fixture)
- D. Light Channel Solderless Snap & Light L-Connector (Sold Separately)
- E. Light Channel .3 Surface Mount Assembly
- F. 24VDC LED Soft Strip (Included)
- G. Lens (Included)
- H. Mounting Clips (Included with every 2 feet of channel)
- I. Remote Power Supply (PS-40L-41A-24VDC shown) (Sold Separately)

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE

---