Lightology

lightology.com
866-954-4489
10-30-26

Project:

Company:

Location: Fixture Type:

SPEC #: **EDG635767**

Approved On: Approved By:


Light Channel .6 Warm Dim Surface Mount

By PureEdge Lighting

Description

The Light Channel .6 Warm Dim Surface Mount is a slim profile made to order channel designed to enhance spaces with depth and dimension, seamlessly integrating into the architecture while delivering premium task lighting. . Channel is available in 12 inch increments up to 120 inches with a diffused white lens (projects clean lights of light eliminating pixelation) or a clear lens (LED diodes will show) for maximum light levels. Available in a 5 watt (4.8 watts) per foot option with Warm Dim 27D (2700K-1800K) or 30D (3000K-2000K) color temperature. Warm Dim technology mimics an incandescent atmosphere by decreasing the color temperature as you dim. Included components: Light Channel Surface Mount Assembly, 24VDC LED Strip, 96 inch power connector (one per fixture), mounting clips (included with every 2 feet of channel), lens, lever nuts and end caps. System requires a 50 watt (PS-60L-ELV) ELV power supply which fits inside junction box (dimmable with ELV), or a remote Universal (UNI) power supply (dimmable with ELV/ TRIAC/0-10V). Note: Required power supply, dimmer control, and optional mounting accessories sold separately.

Shown in satin aluminum / diffused lens

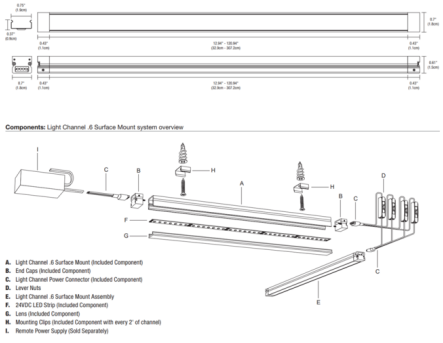

Specifications

COLOR	Diffused Lens
BODY FINISH	Satin Aluminum
WATTAGE	5W
DIMMER	Low Voltage Electronic
DIMENSIONS	12"L x 0.7"W x 0.61"H
INTEGRATED LED MODULE	1 x LED/5W/24V LED

Technical Information

LAMP LIFE	50000 hours
COLOR RENDERING	95 CRI
LAMP COLOR	2700K Warm Dim
LUMENS/WATT	43.80
LUMINOUS FLUX	219 lumens

CLICK TO VIEW PRODUCT

Notes: