

Lightology

lightology.com
866-954-4489
02-13-26

Project:

Company:

Location:

Fixture Type:

SPEC #: EDG648091

Approved On:

Approved By:

Light Channel .6 Warm Dim Surface Mount Micro Grazer

By PureEdge Lighting



Description

The Light Channel .6 Warm Dim Micro Grazer is a slim profile made-to-order channel designed to bring life to textured walls, panels, masonry and undulating tiles. The Micro Grazer is available in 12 inch increments up to 120 inches with a 20 degree linear frosted lens (projects some pixelation) or a clear 7 degree transparent clear lens (LED diodes will show) for maximum light levels. Available in a 5 watts (4.8 watts) per foot option with Warm Dim 27D (2700K-1800K) or 30D (3000K-2000K) color temperature. Warm Dim technology mimics an incandescent atmosphere by decreasing the color temperature as you dim. Included components: Light Channel Micro Grazer Assembly, 96 inch Power Connector (one per fixture), 24VDC LED Soft Strip, mounting clips (included with every 2 feet of channel), end caps, lever nuts, and lens. A PS-60L-ELV-24VDC (50 watt ELV power supply will fit inside a standard junction box), or a remote Universal power supply is required and sold separately. Note: Required power supply, dimmer control, and optional mounting accessories sold separately.

Specifications


COLOR	Clear Lens
BODY FINISH	Satin Aluminum
WATTAGE	5W
DIMMER	Low Voltage Electronic
DIMENSIONS	12" L x 0.7" W x 0.61" H
INTEGRATED LED MODULE	1x LED/5W/24V LED

Technical Information

LAMP LIFE	50000 hours
COLOR RENDERING	92 CRI
LAMP COLOR	2700K Warm Dim
LUMENS/WATT	48.40
LUMINOUS FLUX	242 lumens



Shown in satin aluminum / clear lens

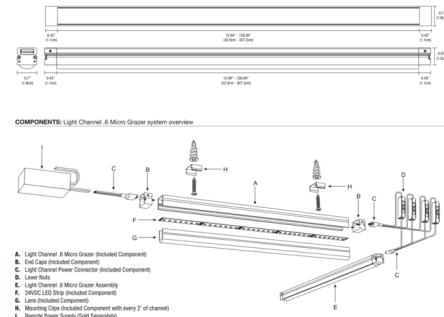

CLICK TO VIEW PRODUCT

Notes: