



DESIGNER

Gregory Kay

BRAND

PureEdge Lighting

DESCRIPTION

The Light Channel .6 Warm Dim Micro Grazer is a slim profile made-to-order channel designed to bring life to textured walls, panels, masonry and undulating tiles. The Micro Grazer is available in 12 inch increments up to 120 inches with a 20 degree linear frosted lens (projects some pixelation) or a clear 7 degree transparent clear lens (LED diodes will show) for maximum light levels. Available in a 5 watts (4.8 watts) per foot option with Warm Dim 27D (2700K-1800K) or 30D (3000K-2000K) color temperature. Warm Dim technology mimics an incandescent atmosphere by decreasing the color temperature as you dim. Included components: Light Channel Micro Grazer Assembly, 96 inch Power Connector (one per fixture), 24VDC LED Soft Strip, mounting clips (included with every 2 feet of channel), end caps, lever nuts, and lens. A PS-60L-ELV-24VDC (50 watt ELV power supply will fit inside a standard junction box), or a remote Universal power supply is required and sold separately. Note: Required power supply, dimmer control, and optional mounting accessories sold separately.




Shown in: Satin Aluminum / Clear Lens

SHADE COLOR	Clear Lens
BODY FINISH	Satin Aluminum
WATTAGE	5W
DIMMER	Low Voltage Electronic
DIMENSIONS	12"L x 0.7"W x 0.61"H
INTEGRATED LED MODULE	
LAMP	1 x LED/5W/24V LED


Technical Information

LUMINOUS FLUX	242 lumens
LUMENS/WATT	48.40
LAMP COLOR	2700K Warm Dim
COLOR RENDERING	92 CRI

SPEC # EDG648091

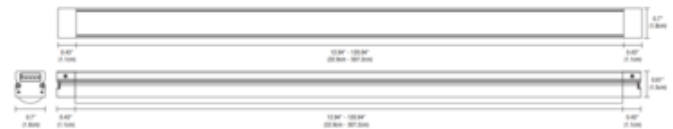

COMPONENTS: Light Channel .6 Micro Grazer system overview

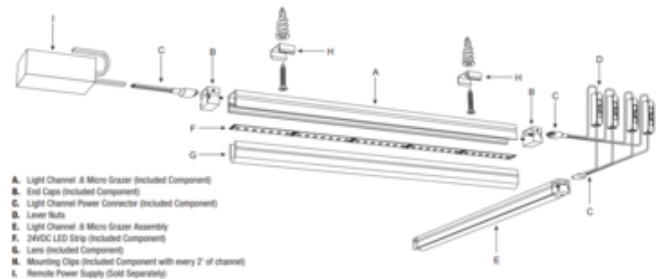

COMPANY	PROJECT	FIXTURE TYPE	APPROVED BY	DATE