



# Glide Glass Downlight Suspension w/ End Feed Power

SPEC #

EDG650083



DESIGNER


Gregory Kay

BRAND

PureEdge Lighting

## DESCRIPTION

Glide Glass Downlight Suspension with End Feed is a linear LED fixture that offers a clean direct beam. Available with one or two canopies. Features a diffused white lens with 100 degree beam spread and optional black or white louvers for adjustability. Glass available in Black, White or Mirror. Channel lengths sold in 12 inch increments from 36 to 120 inches. Available in three wattage options, a variety of finishes, and a spectrum of color temperature options. Supplied with 12 feet of adjustable coaxial cables (additional aircraft cables added for support when fixture exceeds 72 inches). 120 volt input, 24VDC Class 2 output, electronic low voltage LED power supply included in canopy. Canopy size dependent on length of fixture. Dimmable with an electronic low voltage dimmer: (Lutron Diva DVELV-300P, Lutron Skylark SELV-300P, Lutron Maestro MAELV-600 and Lutron Radio Ra 2, or Legrand Adorne ADTP703TU), sold separately. ETL listed. 5 year warranty. Product is built to order.

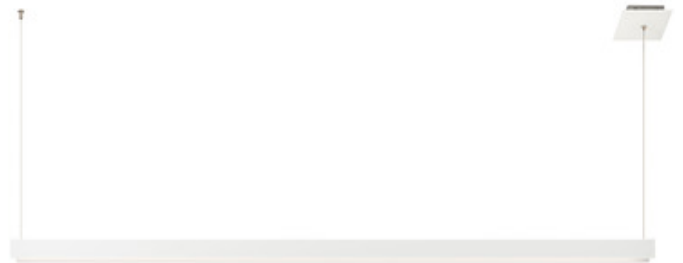

Shown in: White Glass / No Louver


SHADE COLOR	No Louver
BODY FINISH	White Glass
WATTAGE	15W
DIMMER	Low Voltage Electronic
DIMENSIONS	36"L x 1.74"W x 2.5"H
INTEGRATED LED MODULE	
LAMP	3 x LED/5W/120V LED

### Technical Information

LUMINOUS FLUX	735 lumens
LUMENS/WATT	147.00
LAMP COLOR	2700K
COLOR RENDERING	95 CRI

SPEC #

EDG650083

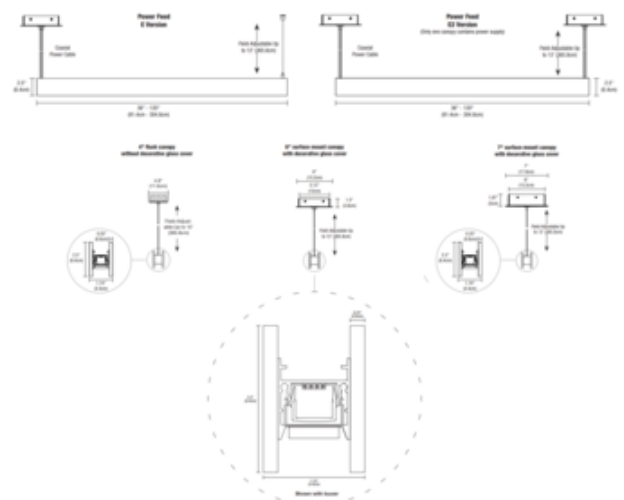

CANOPY CHART			
Version	4" Canopy (Point)	6" Canopy (Surface Mount)	8" Canopy (Surface Mount)
36" & 48" lengths	18" x 18"	18" x 18"	N/A
72" & 96" lengths	18" x 18"	18" x 18"	18" x 18"
108" & 120" lengths	18" x 18"	18" x 18"	18" x 18"

COMPANY

PROJECT

FIXTURE TYPE

APPROVED BY

DATE