

# Lightology

lightology.com  
866-954-4489  
05-16-26

Project: \_\_\_\_\_  
 Company: \_\_\_\_\_  
 Location: \_\_\_\_\_ Fixture Type: \_\_\_\_\_  
 SPEC #: **EDG651300**  
 Approved On: \_\_\_\_\_ Approved By: \_\_\_\_\_

## Glide Glass Warm Dim Suspension w/ Center Feed Power

By PureEdge Lighting



### Description

Glide Glass Warm Dim Center Feed Downlight Suspension features a diffused white lens with 100 degree beam spread. Glass available in Black, White or Mirror with optional black or white louvers. Channel lengths sold in 12 inch increments from 36 to 120 inches with 5 (4.4 watts) LED watts per foot. Available in 27D (2700K to 2000K) and 30D (3000K to 2000K) Warm Dim color temperatures. Includes rectangle canopy with 120V/24VDC Universal (UNI) power supply (dimmable with an electronic low voltage (ELV), 0-10V, or Triac (magnetic) dimmer). Note: Product is built to order.

### Specifications


COLOR . . . . . No Louver  
 BODY FINISH . . . . . Mirror Glass  
 WATTAGE . . . . . 15W  
 DIMMER . . . . . Low Voltage Electronic  
 DIMENSIONS . . . . . 36"L x 1.74"W x 2.5"H  
 INTEGRATED LED MODULE . . . . . 3 x LED/5W/120V LED

### Technical Information

LAMP LIFE . . . . . 50000 hours  
 COLOR RENDERING . . . . . 95 CRI  
 LAMP COLOR . . . . . 2700K Warm Dim  
 LUMENS/WATT . . . . . 181.20  
 LUMINOUS FLUX . . . . . 906 lumens



Shown in mirror glass / no louver

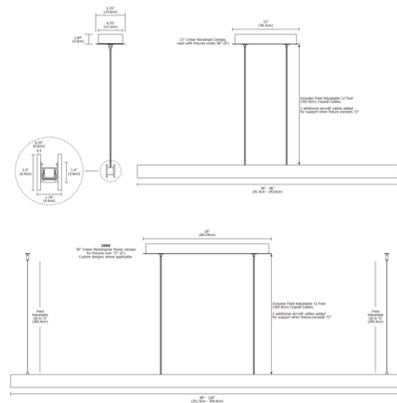

CLICK TO VIEW PRODUCT

Notes: